



Customer Name:

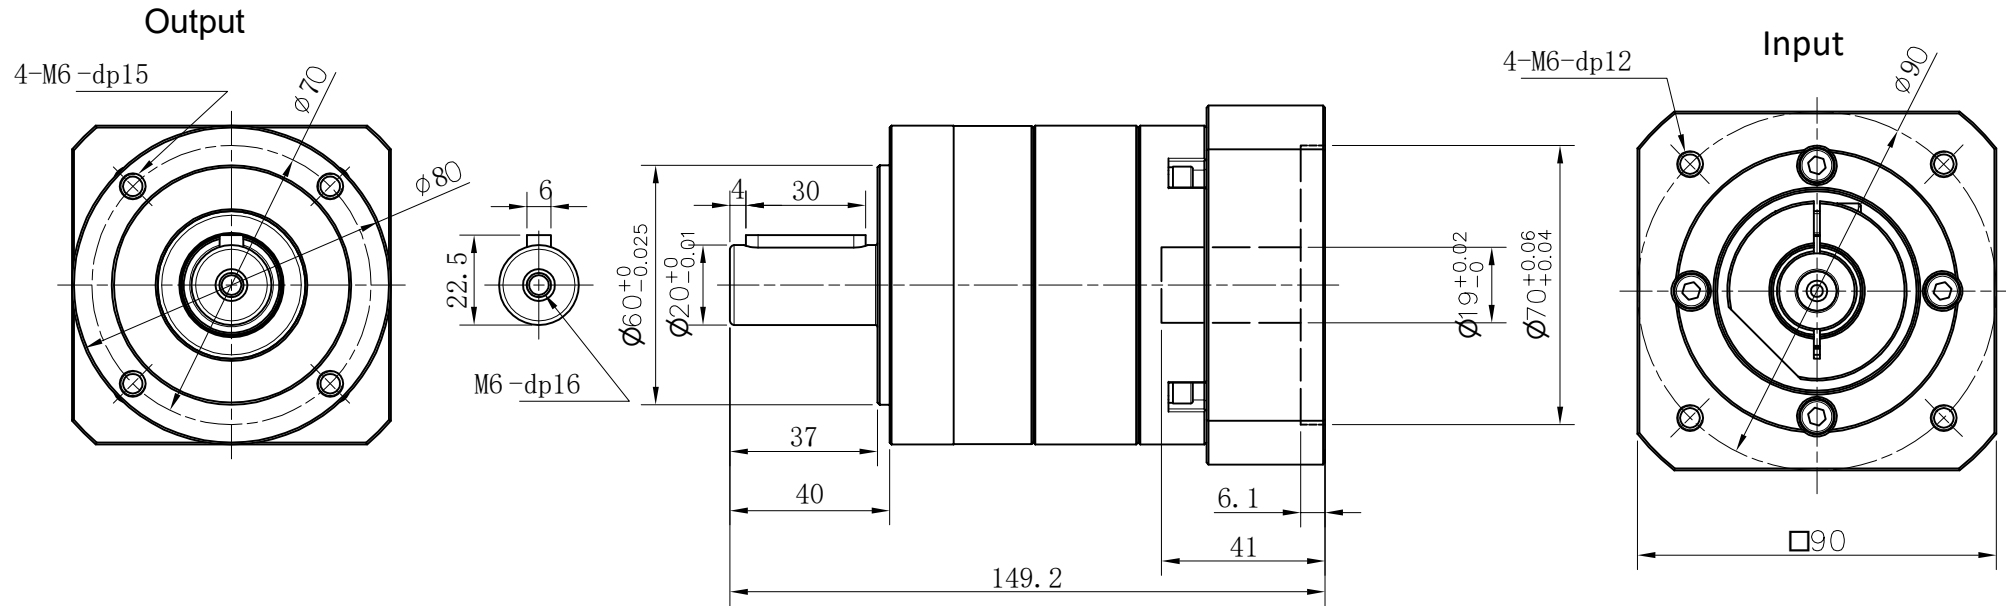

Transmission Ratio	( A ):1	Mass Moments Of Inertia	( \ )Kg.cm <sup>2</sup>													
Rated Output Torque	( C )Nm	Max Output Torque	( D )Nm	10	82	148	Sign/Date									
Rated Input Speed	3000rpm	Max Input Speed	\	7	116	209										
Max Radial Force	\	Max Axial Force	\	5	135	243										
Efficiency	≥ 94%	Operating Temperature	-20°~+90°	4	116	209										
Mounting Position	Any	Lubrication Method	Synthetic grease	3	108	194										
Weight ±3%	\	Service Life	20000h	Ratio	A	B	C	D	Ratio	A	B	C	D			
Standard Backlash	≤ 10 arcmin	Protection Class	IP65	Note					Precision Planetary Reducer	GAE080						
Motor Power	-- KW	Noise Level	65dB							GAE080-L1-A1						
Motor Dimensions										Shaft Type		Precision				

Above specifications are for standard reducer and may be subject to change without notice.