Customer Name:

Output

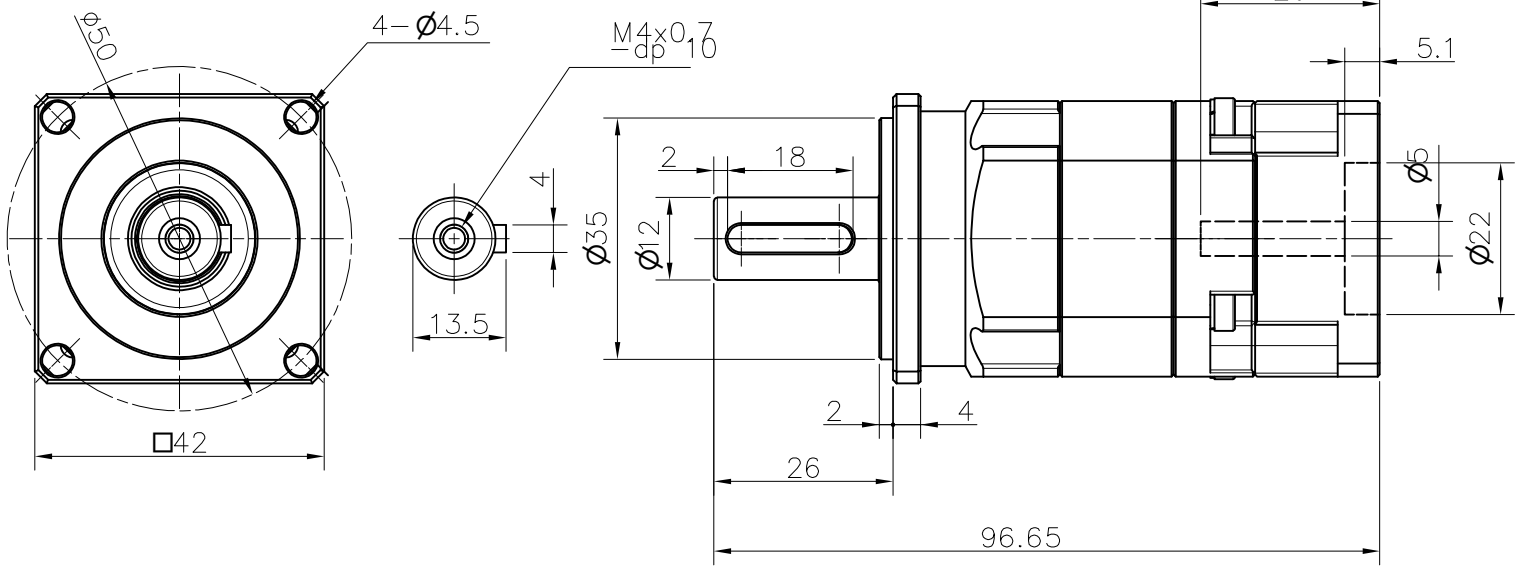

Input

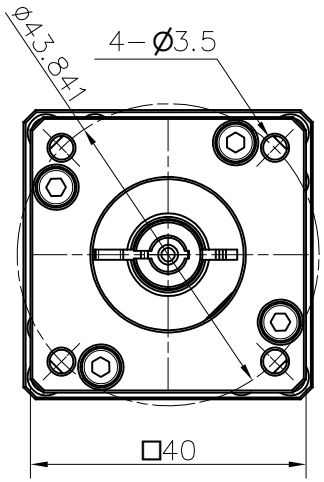



Transmission Ratio	(A):1	Mass Moments Of Inertia	(\ )Kg.cm^2
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm
Rated Input Speed	3000rpm	Max Input Speed	\
Max Radial Force	\	Max Axial Force	\
Efficiency	≥ 97%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	\	Service Life	20000h
Standard Backlash	≤ 10 arcmin	Protection Class	IP65
Motor Power	-- KW	Noise Level	60dB
Motor Dimensions			

					Sign/Date					
	10		20	539						
	7		20	51						
	5		20	60						
	4		20	54						
	3		20	57						
Ratio	A	B	C	D		Ratio	A	B	C	D

Note

ø8−ø5

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

GA042

GA042-L1-R1

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.