Customer Name:

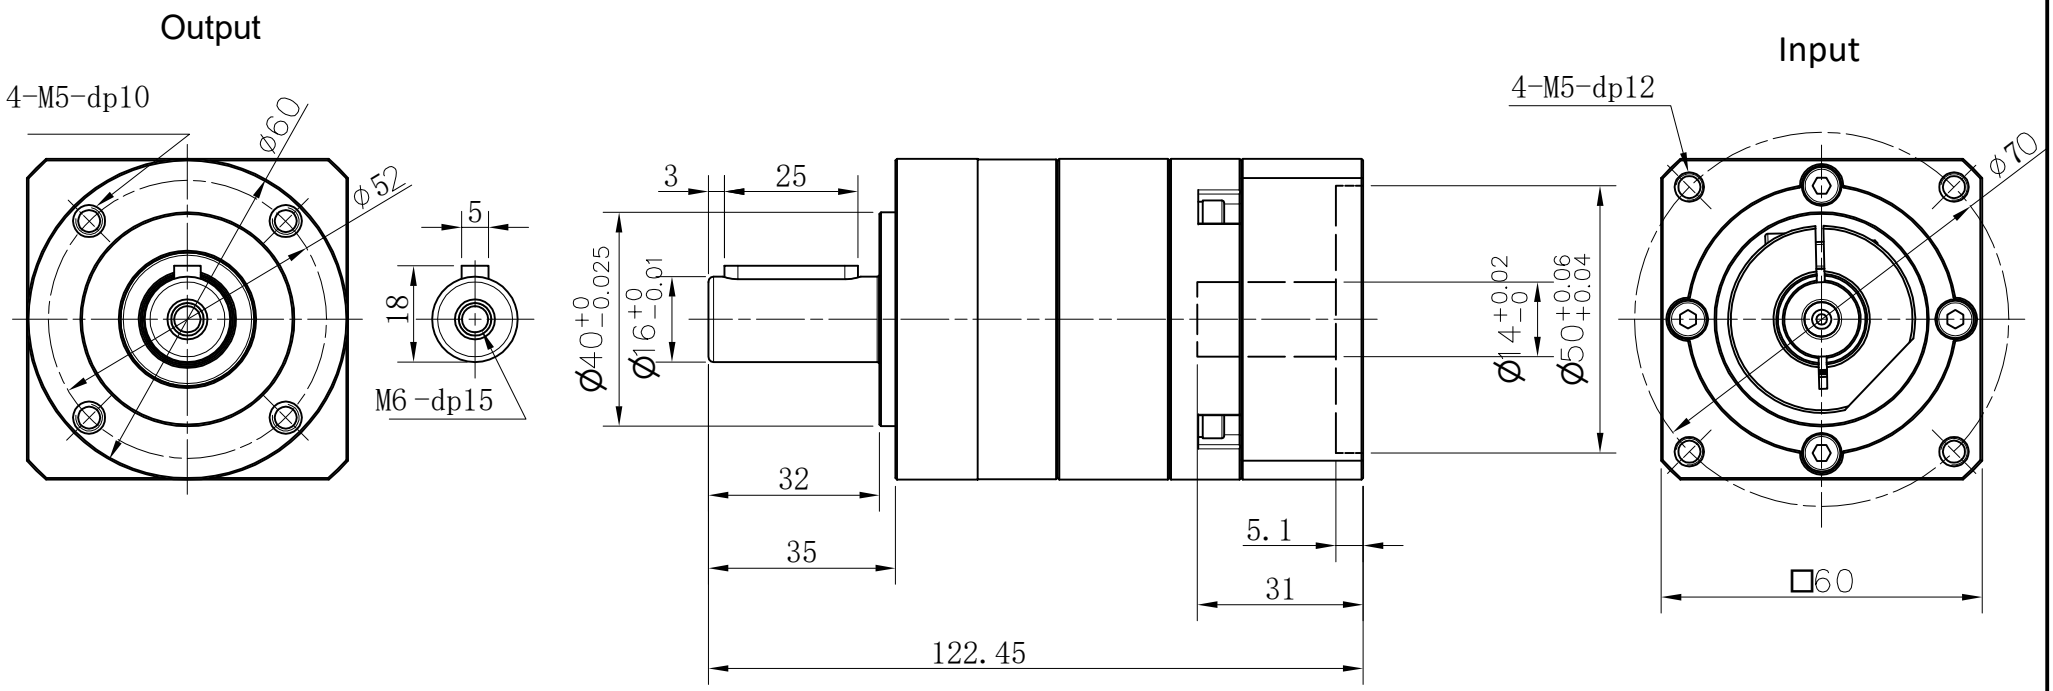

Transmission Ratio	(A):1	Mass Moments Of Inertia	(\ )Kg.cm^2
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm
Rated Input Speed	3000rpm	Max Input Speed	\
Max Radial Force	\	Max Axial Force	\
Efficiency	≥ 94%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	\	Service Life	20000h
Standard Backlash	≤ 10 arcmin	Protection Class	IP65
Motor Power	- - KW	Noise Level	63dB
Motor Dimensions			

Ratio	A	B	C	D
	10		33	99
	7		41	123
	5		49	147
	4		41	123
	3		45	135

Sign/Date

Ratio	A	B	C	D

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

GAE060

GAE060-L1-B1

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.