
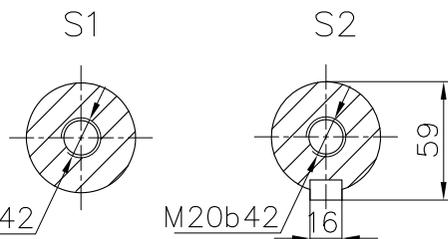
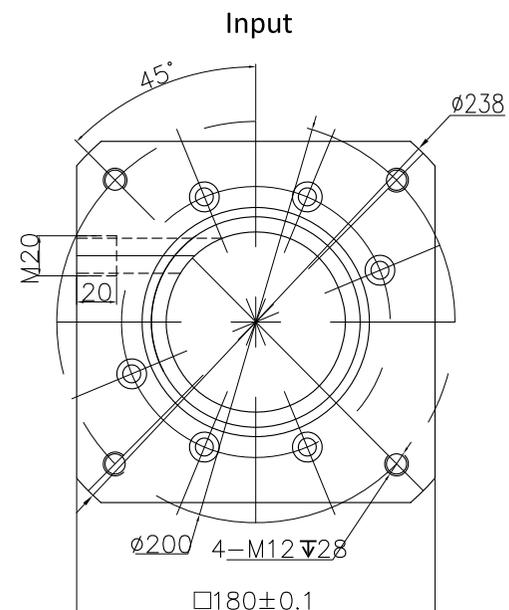
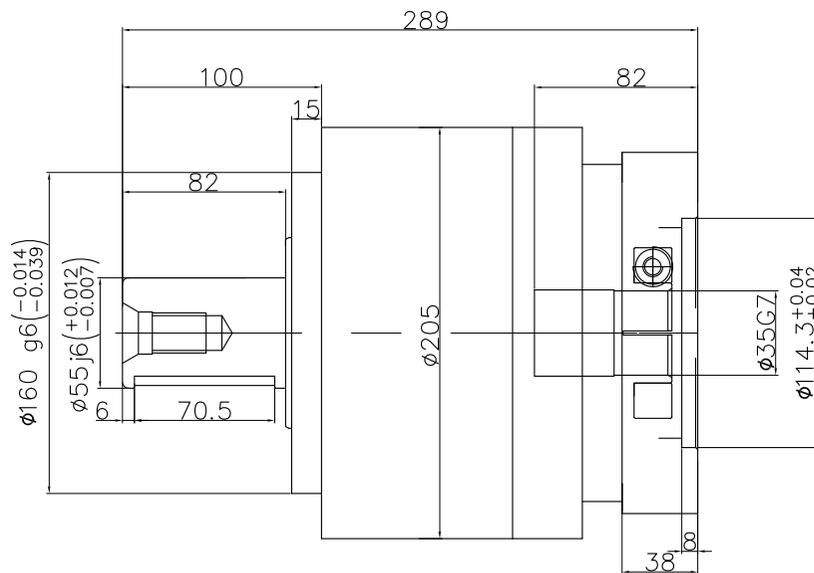


Customer name :

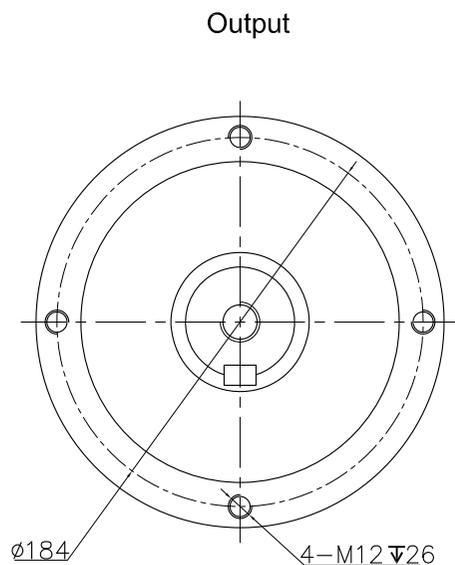

Transmission ratio	(<u> A</u>):1	Mass moments of inertia	(<u> B</u>)Kg.cm ²
Rated output torque	(<u> C</u>)Nm	Max.output torque	(<u> D</u>)Nm
Rated input speed	3000rpm	Max input speed	6000rpm
Max.radial force	14500N	Max.axial force	7250N
Efficiency	≥ 97%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	29Kg	Service life	20000h
Standard backlash	≤ 5 arcmin	Protection class	IP65
Motor power		Noise level	67dB
Motor dimensions			

	10	22.51	900	1620	Sign/Date						
	7	22.48	1100	1980			8	22.59	1000	1800	
	5	23.29	1200	2160	Ratio		6	22.75	1100	1980	
	4	23.67	1050	1890			3	28.98	588	1058	
Ratio	A	B	C	D		Ratio	A	B	C	D	
Note						Precision planetary reducer	GE205				
Mark	No.	Sign	Date				GE205-L1				
							Shaft Type	Precision			

Above specifications are for standard reducer and may be subject to change without notice.