


Customer name:



Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²										
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm	40	0.47	255	459	Sign/Date					
Rated input speed	3000rpm	Max input speed	6000rpm	35	0.47	300	540		100	0.44	220	396	
Max.radial force	6700N	Max.axial force	3350N	30	0.47	310	558		80	0.44	255	459	
Efficiency	$\geq 94\%$	Operating temperature	$-20^{\circ}\sim+90^{\circ}$	25	0.47	320	576		70	0.44	300	540	
Mounting position	Any	Lubrication method	Synthetic grease	20	0.47	280	504		60	0.44	310	558	
Weight $\pm 3\%$	9.5Kg	Service life	20000h	15	0.47	200	360	50	0.44	320	576		
Standard backlash	≤ 7 arcmin	Protection class	IP65	Ratio	A	B	C	D	Ratio	A	B	C	D
Motor power		Noise level	63dB	NOTE				Precision Planetary Reducer				GCB120A	
Motor dimensions								Mark				No.	Sign
				DRAW							Shaft Type		Precision
				CHEC									
				APPR									
				RULE									

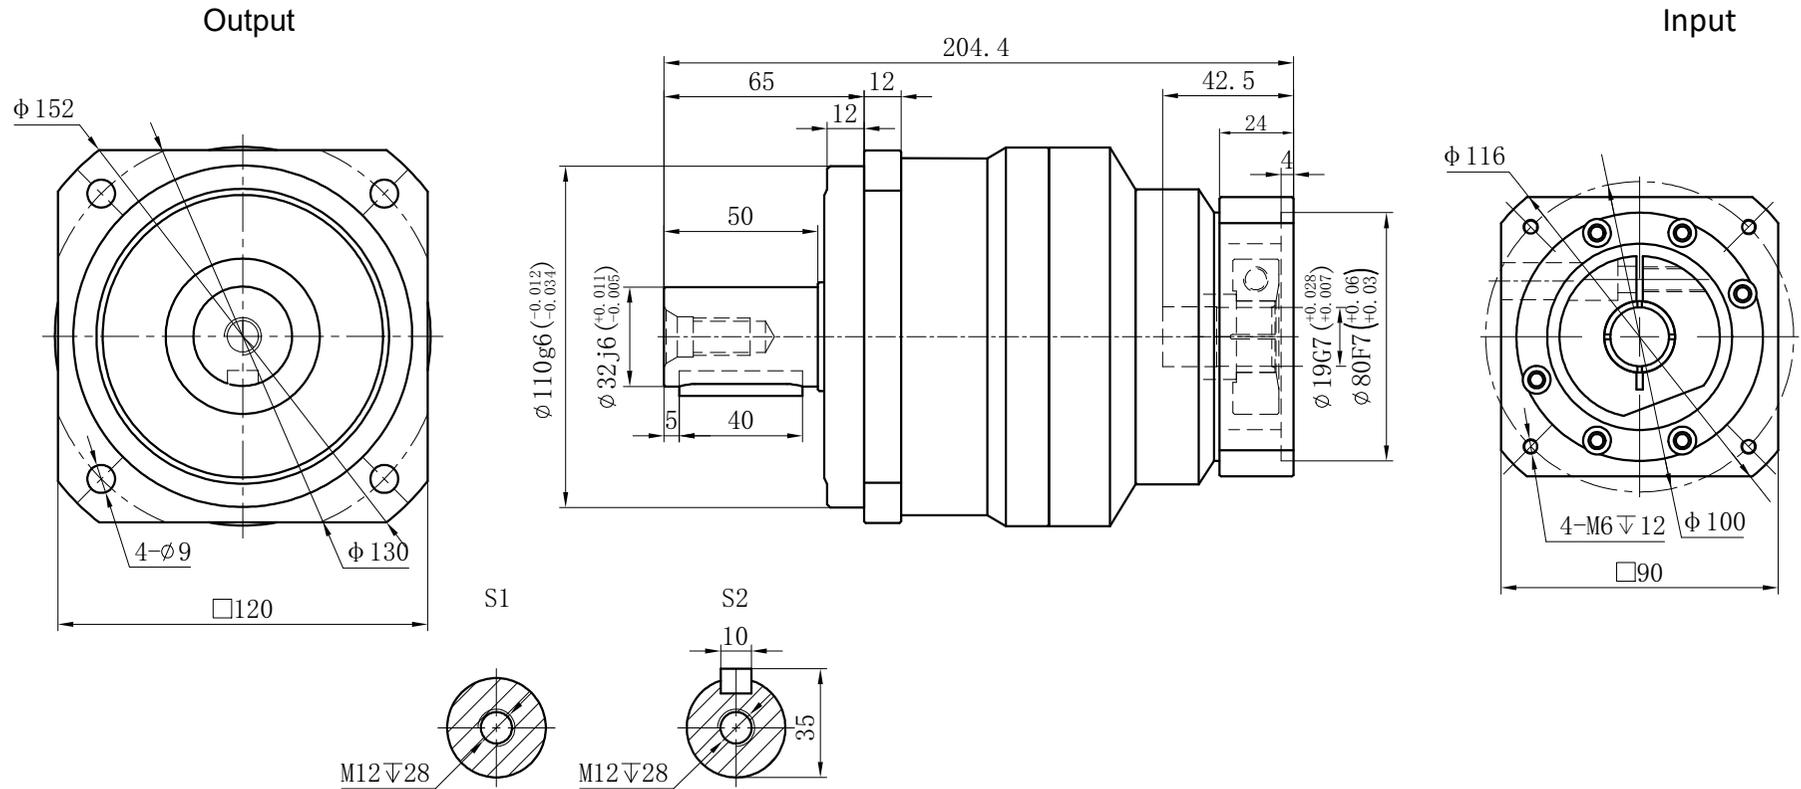