
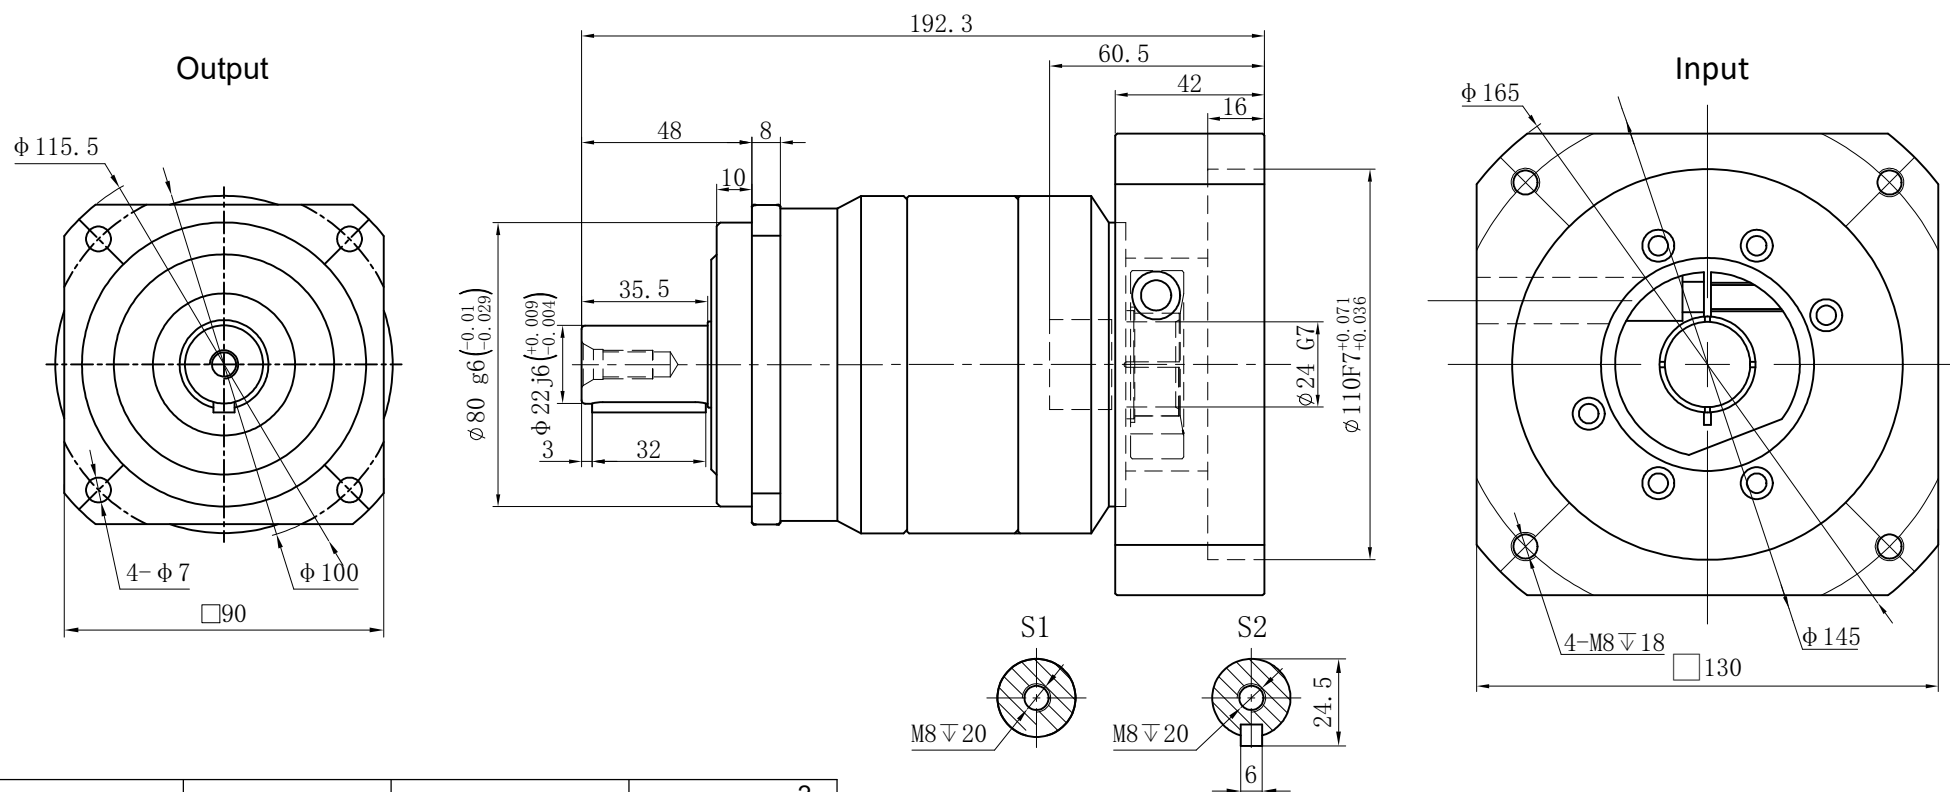


Customer name:



Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²	6										
Rated output torque	(<u> C </u>)Nm	Max.output torque	(<u> D </u>)Nm		40	0.47	120	215	Sign/Date					
Rated input speed	3000rpm	Max input speed	6000rpm		35	0.47	135	240			100	0.44	100	180
					30	0.47	140	250			80	0.44	120	215
					25	0.47	150	270			70	0.44	135	240
					20	0.47	110	195			60	0.44	140	250
Max.radial force	3250N	Max.axial force	1625N		15	0.47	100	180		50	0.44	150	270	
Efficiency	≥ 94%	Operating temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D
Mounting position	Any	Lubrication method	Synthetic grease	Note					Precision planetary reducer	GCB090A				
Weight ±3%	5.1Kg	Service life	20000h											
Standard backlash	≤ 7 arcmin	Protection class	IP65		Mark	No.	Sign	Date		GCB090A-L2				
Motor power		Noise level	60dB			DRAW								
Motor dimensions						CHEC								
						APPR								
					RULE					Shaft Type	Precision			

Above specifications are for standard reducer and may be subject to change without notice.