

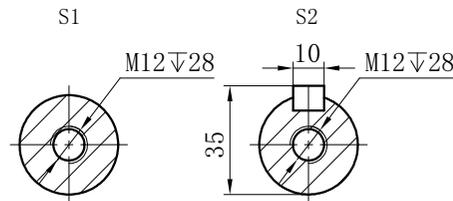
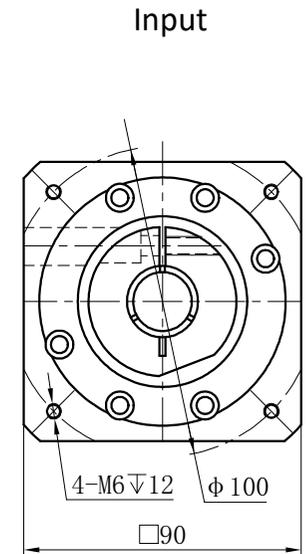


Customer name:

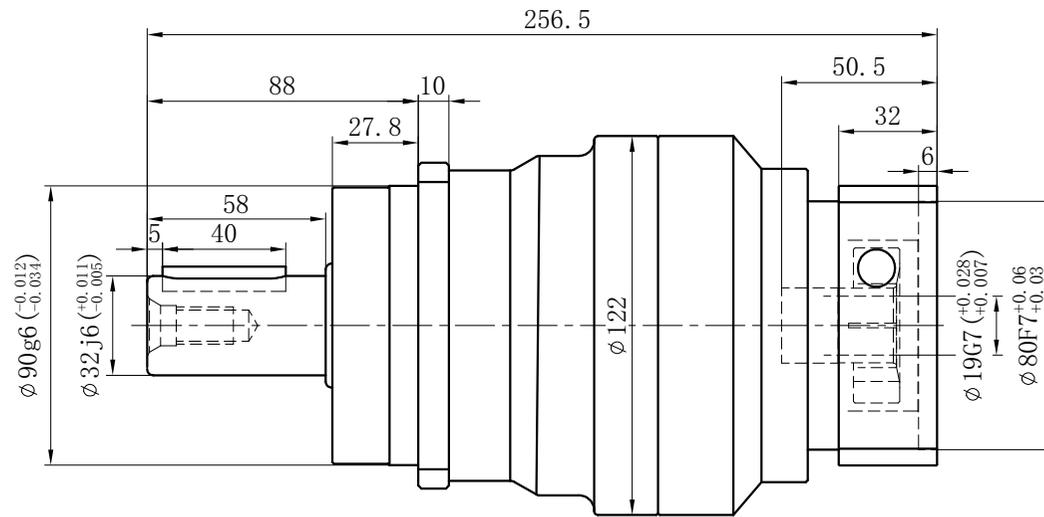

Transmission ratio	( <u> A </u> ):1	Mass moments of inertia	( <u> B </u> )Kg.cm <sup>2</sup>												
Rated output torque	( <u> C </u> )Nm	Max.Output torque	( <u> D </u> )Nm		35	0.47	300	600	Sign/Date		100	0.44	230	460	
Rated input speed	4000rpm	Max input speed	8000rpm		25	0.47	330	660			70	0.44	300	600	
Max.radial force	9200N	Max.axial force	5820N		20	0.47	290	580			50	0.44	330	660	
Efficiency	≥ 94%	Operating temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D	
Mounting position	Any	Lubrication method	Synthetic grease	NOTE				Precision Planetary Reducer				GF100			
Weight ±3%	8.1Kg	Service life	20000h									GF100-L2			
Standard backlash	≤ 7 arcmin	Protection class	IP65									Shaft Type Precision			
Motor power		Noise level	63dB												
Motor dimensions															

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

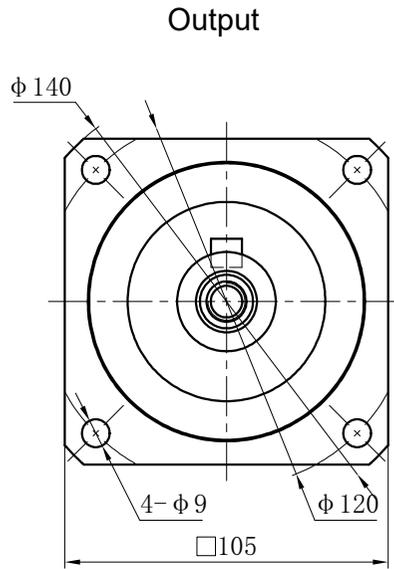