
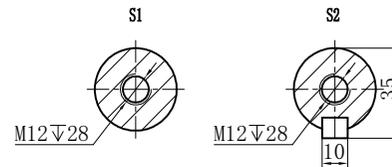
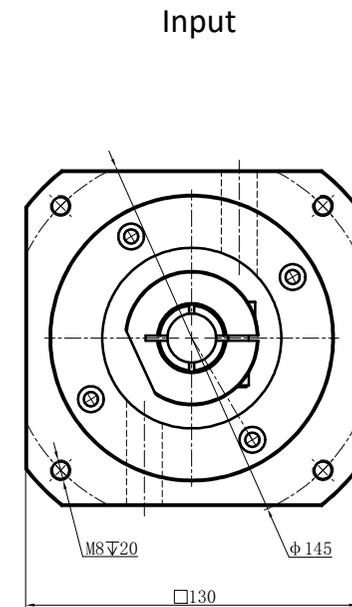
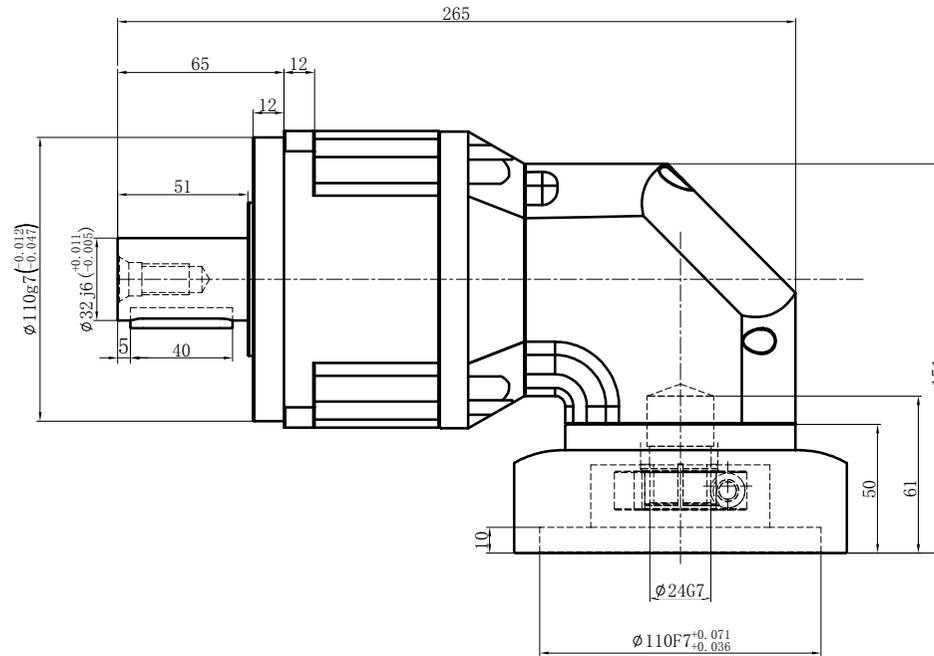


Customer name:

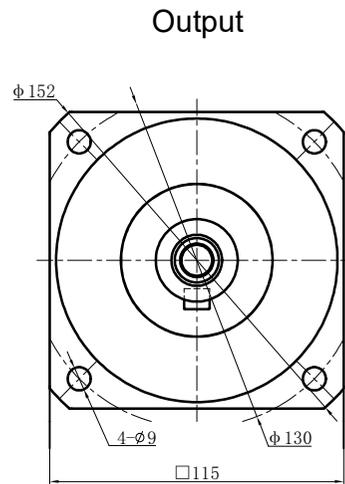

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm ²	60	2.25	310	558	Sign/Date					
Rated output torque	(C)Nm	Max.Output torque	(D)Nm	50	2.25	230	414						
Rated input speed	4000rpm	Max input speed	8000rpm	40	2.25	260	468						
Max.radial force	6700N	Max.axial force	3350N	35	2.25	300	540			100	2.25	230	414
Efficiency	≥ 92%	Operating temperature	-20°~+90°	30	2.25	310	558			80	2.25	260	468
Mounting position	Any	Lubrication method	Synthetic grease	25	2.25	325	585		70	2.25	300	540	
Weight ±3%	14.2Kg	Service life	20000h	Ratio	A	B	C	D	Ratio	A	B	C	D
Standard backlash	≤ 9 arcmin	Protection class	IP65	NOTE				Precision Planetary Reducer			GBR115		
Motor power		Noise level	68dB								GBR115-L2		
Motor dimensions			Shaft Type										