
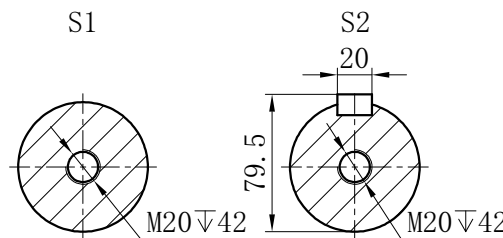
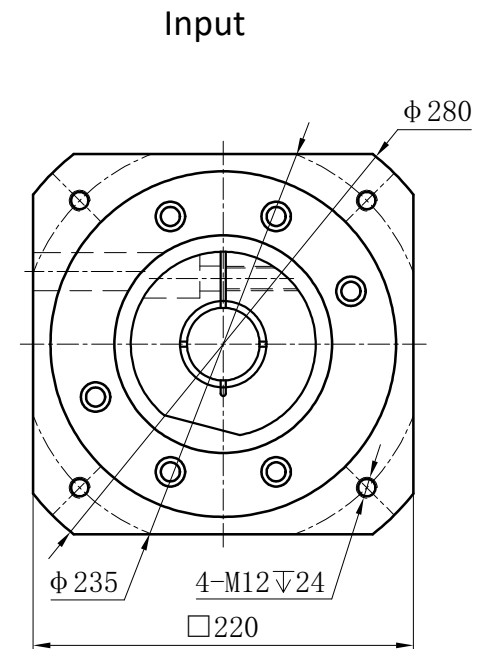
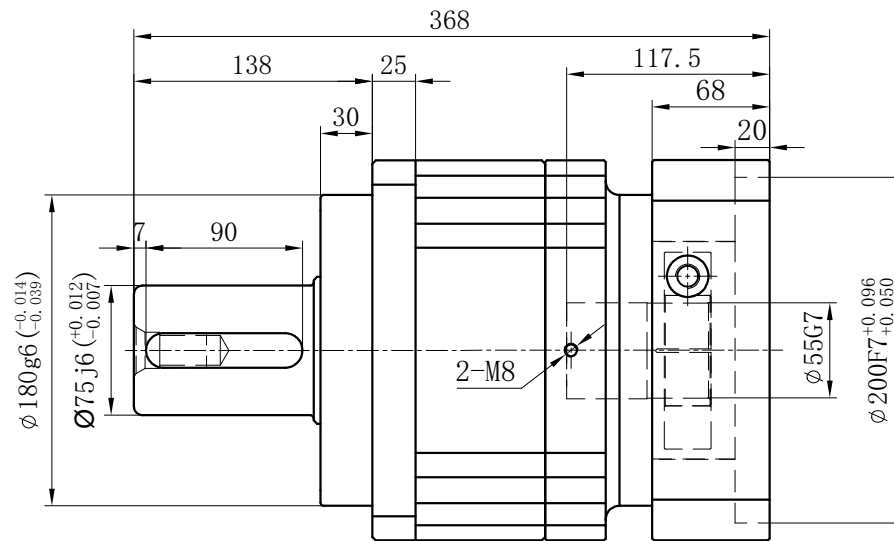


Customer Name:

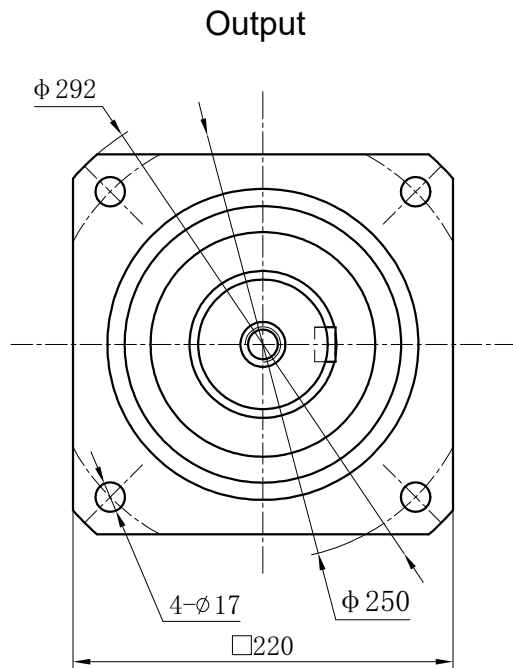

Transmission Ratio	(<u> A </u>):1	Mass Moments Of Inertia	(<u> B </u>)Kg.cm ²
Rated Output Torque	(<u> C </u>)Nm	Max Output Torque	(<u> D </u>)Nm
Rated Input Speed	2000rpm	Max Input Speed	4000rpm
Max Radial Force	50000N	Max Axial Force	25000N
Efficiency	≥ 97%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	51.5Kg	Service Life	20000h
Standard Backlash	5 arcmin	Protection Class	IP65
Motor Power	-- KW	Noise Level	70dB
Motor Dimensions			

	3	69.61	1150	2070	Sign/Date		7	50.97	1810	3258	
	4	54.37	1700	3060			8	50.84	1600	2880	
	5	53.27	2008	3614				10	50.56	1550	2790
	6	51.72	1900	3420							
Ratio	A	B	C	D		Ratio	A	B	C	D	
Note					Precision Planetary Reducer	GB220					
	Mark	No.	Sign	Date		GB220-L1					
		DRAW									
		CHEC									
		APPR									
		RULE									
						Shaft Type	Precision				

Above specifications are for standard reducer and may be subject to change without notice.