

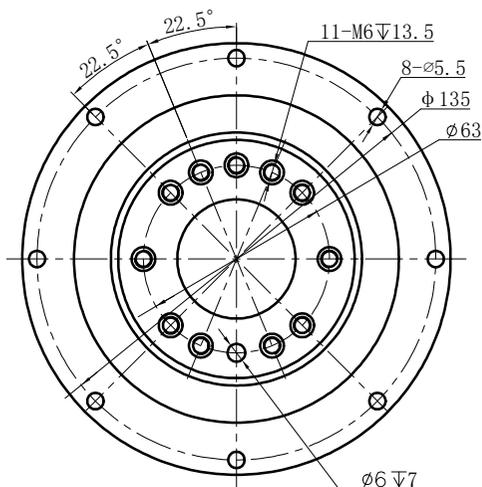


Customer name:

Output

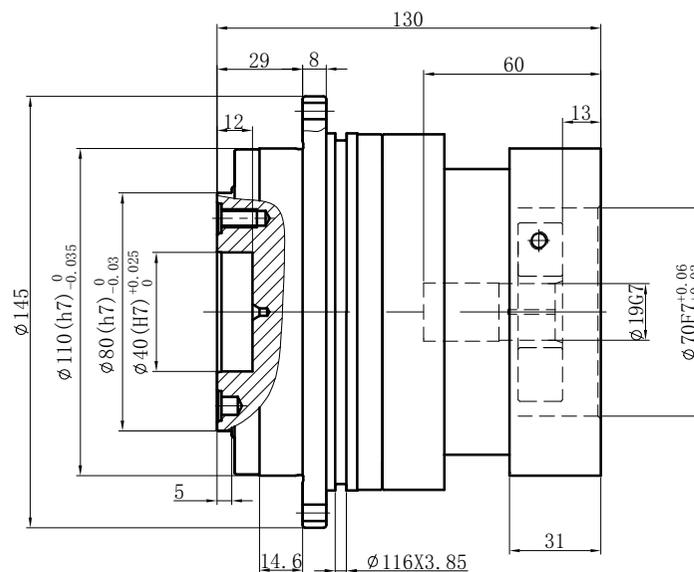

Input

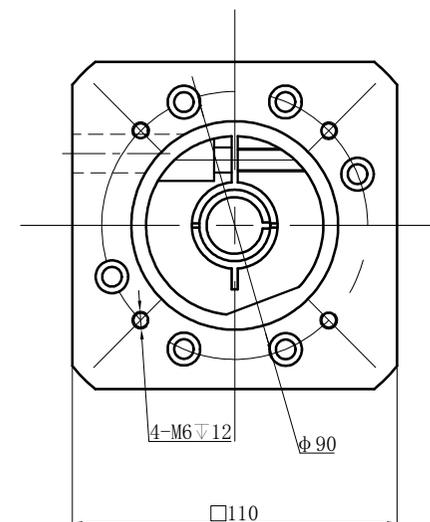

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm ²											
Rated output torque	(C)Nm	Max.Output torque	(D)Nm											
Rated input speed	4000rpm	Max input speed	8000rpm		10	2.57	230	414	Sign/Date					
Max Bending Moment	430Nm	Max.axial force	2990N		7	2.62	300	540						
Efficiency	≥ 97%	Operating temperature	-20°~+90°		5	2.71	330	594						
Mounting position	Any	Lubrication method	Synthetic grease	Ratio	4	2.87	270	486						
Weight ±3%	5.9Kg	Service life	20000h		A	B	C	D		Ratio	A	B	C	D
Standard backlash	≤ 5 arcmin	Protection class	IP65	NOTE				Precision Planetary Reducer				GD110		
Motor power		Noise level	63dB					Ø24-Ø19				GD110-L1		
Motor dimensions														
								Mark	No.	Sign	Date			
					DRAW									
					CHEC									
					APPR									
					RULE									