


Customer name:

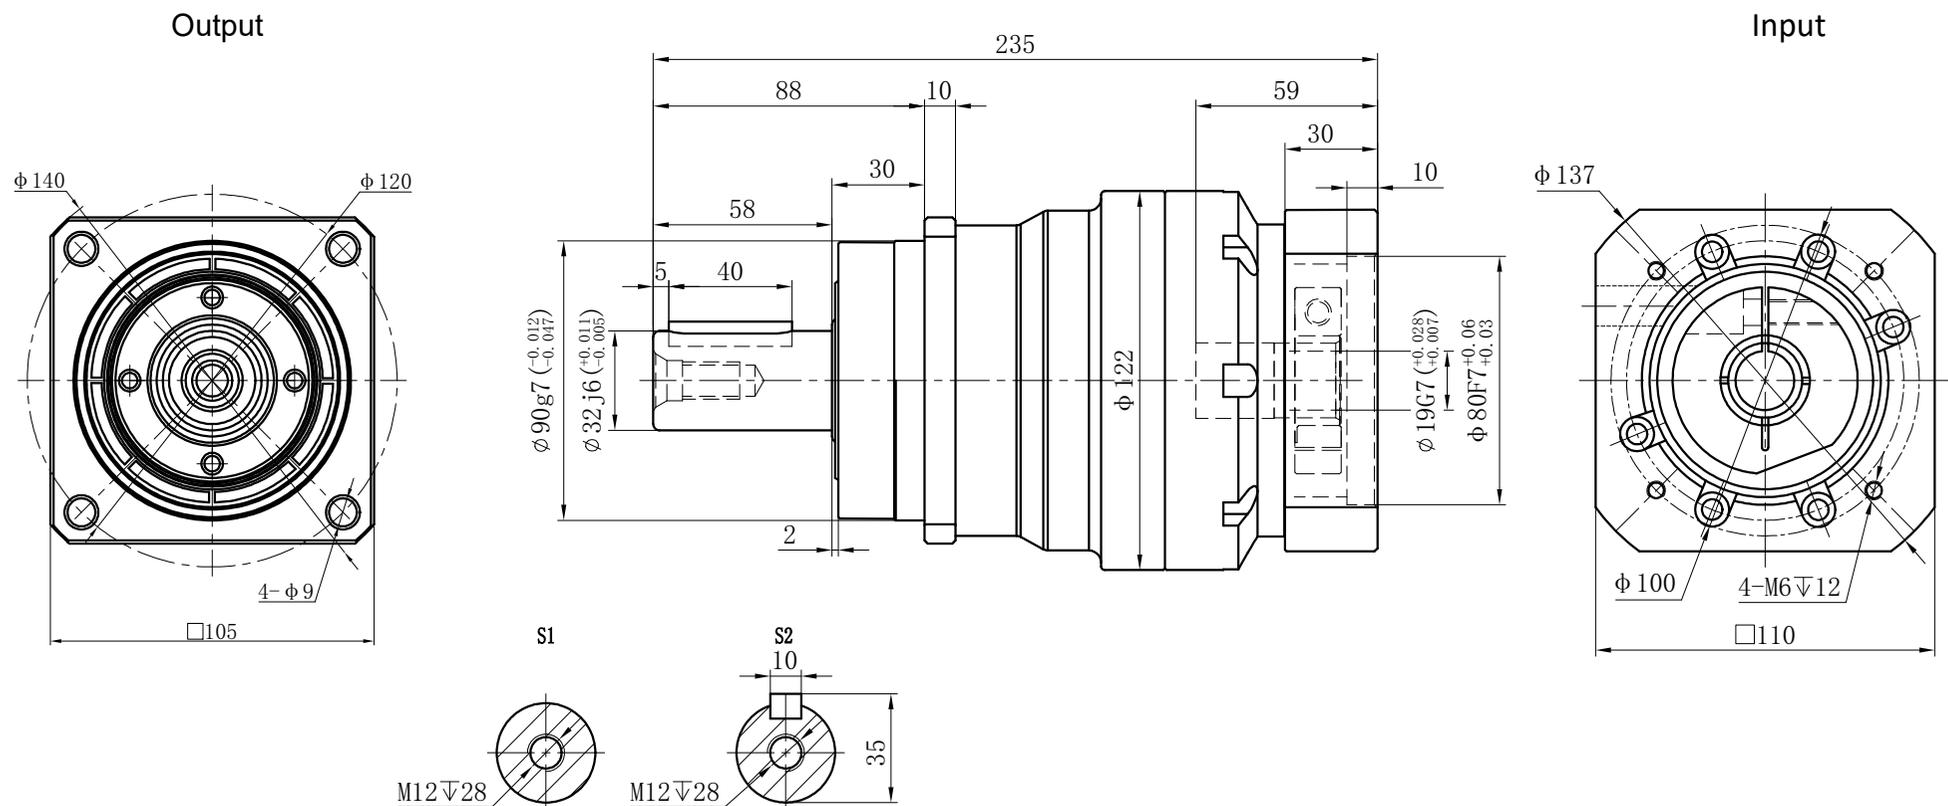

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm ²
Rated output torque	(C)Nm	Max.Output torque	(D)Nm
Rated input speed	4000rpm	Max input speed	8000rpm
Max.radial force	9200N	Max.axial force	5820N
Efficiency	≥ 97%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	8.9Kg	Service life	20000h
Standard backlash	≤ 5 arcmin	Protection class	IP65
Motor power		Noise level	63dB
Motor dimensions			

	10	2.57	230	414
	7	2.62	300	540
	5	2.71	330	594
	4	2.74	290	522
Ratio	A	B	C	D

Sign/Date					
Ratio	A	B	C	D	

NOTE
Bushing
φ24-φ19

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

GF100

GF100-L1

Shaft Type Precision