


Customer Name:


Output

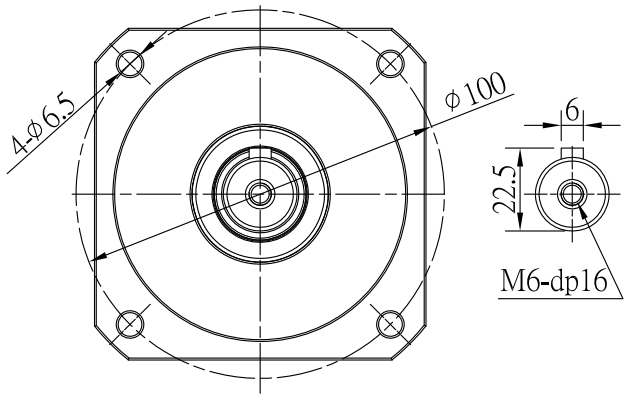

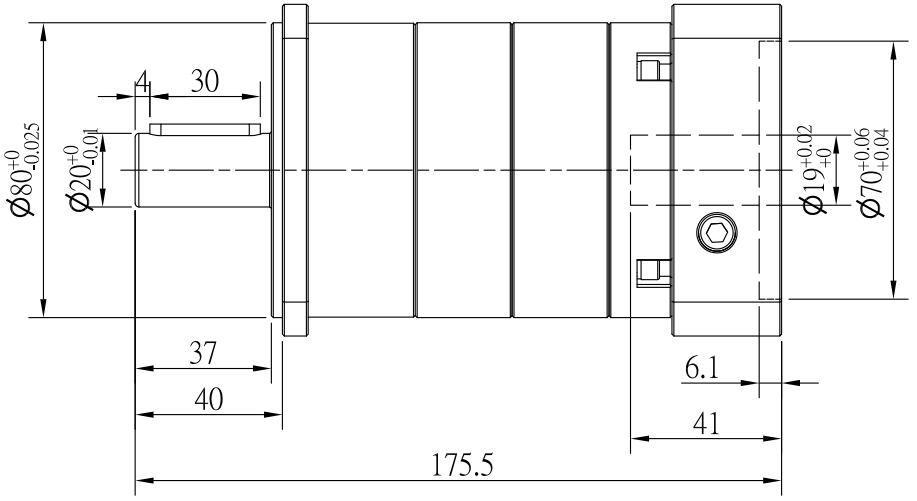

Input

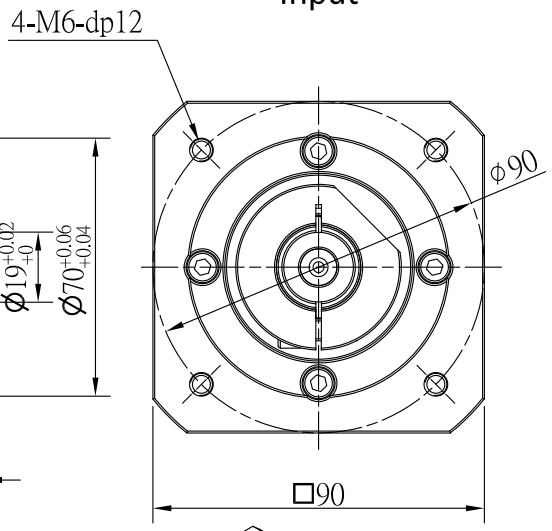



Transmission Ratio	(A):1	Mass Moments Of Inertia	(\ )Kg.cm^2
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm
Rated Input Speed	3000rpm	Max Input Speed	\
Max Radial Force	\	Max Axial Force	\
Efficiency	≥ 94%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	\	Service Life	20000h
Standard Backlash	≤ 10 arcmin	Protection Class	IP65
Motor Power	--KW	Noise Level	65dB
Motor Dimensions			

					Sign/Date					
	15		108	324						
	20		116	348						
	25		135	405						
	30		108	324						
	40		116	348						
	50		135	405						
Ratio	A	B	C	D		Ratio	A	B	C	D

Note

Mark	No.	Sign	Date
DRAW			
CHEC			
APPR			
RULE			

Precision Planetary Reducer

GA090

GEARKO®

GA090-L2-A1

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.