


Customer Name:

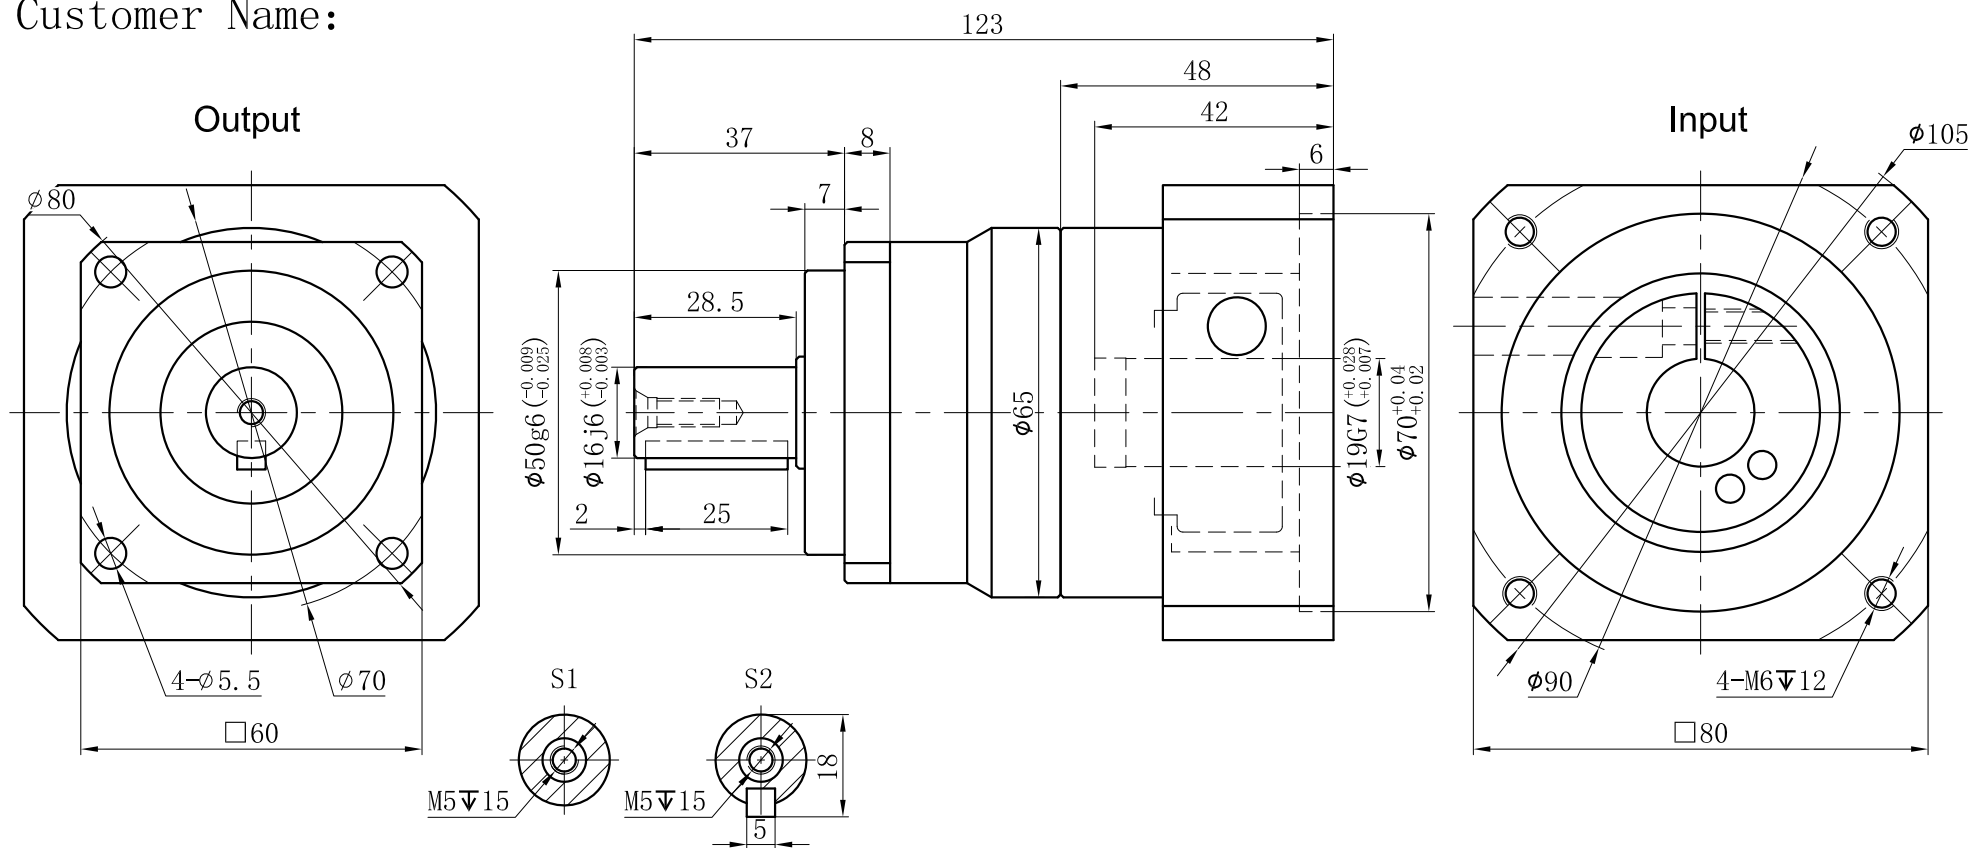

|                     |                    |                         |                                    |
|---------------------|--------------------|-------------------------|------------------------------------|
| Transmission Ratio  | ( <u>  A  </u> ):1 | Mass Moments Of Inertia | ( <u>  B  </u> )Kg.cm <sup>2</sup> |
| Rated Output Torque | ( <u>  C  </u> )Nm | Max Output Torque       | ( <u>  D  </u> )Nm                 |
| Rated Input Speed   | 3000rpm            | Max Input Speed         | 5000rpm                            |
| Max Radial Force    | 1530N              | Max.axial Force         | 765N                               |
| Efficiency          | ≥ 97%              | Operating Temperature   | -20°~+90°                          |
| Mounting Position   | Any                | Lubrication Method      | Synthetic grease                   |
| Weight ±3%          | 1.3Kg              | Service Life            | 20000h                             |
| Standard Backlash   | ≤ 5 arcmin         | Protection Class        | IP65                               |
| Motor Power         | - - KW             | Noise Level             | 58dB                               |
| Motor Dimensions    |                    |                         |                                    |

|                                                                                       |    |      |      |      |           |                                                                                       |   |      |           |    |
|---------------------------------------------------------------------------------------|----|------|------|------|-----------|---------------------------------------------------------------------------------------|---|------|-----------|----|
|                                                                                       | 10 | 0.13 | 35   | 63   | Sign/Date |                                                                                       |   |      |           |    |
|                                                                                       | 8  | 0.13 | 45   | 81   |           |                                                                                       | 7 | 0.13 | 45        | 81 |
|                                                                                       | 6  | 0.13 | 50   | 90   |           |                                                                                       | 5 | 0.13 | 55        | 99 |
|                                                                                       | 4  | 0.14 | 45   | 81   |           |                                                                                       | 3 | 0.16 | 40        | 72 |
| Ratio                                                                                 | A  | B    | C    | D    |           | Ratio                                                                                 | A | B    | C         | D  |
| Note                                                                                  |    |      |      |      |           | Precision Planetary Reducer                                                           |   |      | GCB060    |    |
|                                                                                       |    |      |      |      |           |                                                                                       |   |      |           |    |
|                                                                                       |    |      |      |      |           |                                                                                       |   |      |           |    |
|  |    | Mark | No.  | Sign | Date      |  |   |      | GCB060-L1 |    |
|                                                                                       |    |      | DRAW |      |           |                                                                                       |   |      |           |    |
|                                                                                       |    |      | CHEC |      |           |                                                                                       |   |      |           |    |
|                                                                                       |    |      | APPR |      |           |                                                                                       |   |      |           |    |
|                                                                                       |    |      | RULE |      |           |                                                                                       |   |      |           |    |
|                                                                                       |    |      |      |      |           |                                                                                       |   |      |           |    |
|                                                                                       |    |      |      |      |           | Shaft Type                                                                            |   |      | Precision |    |

Above specifications are for standard reducer and may be subject to change without notice.