
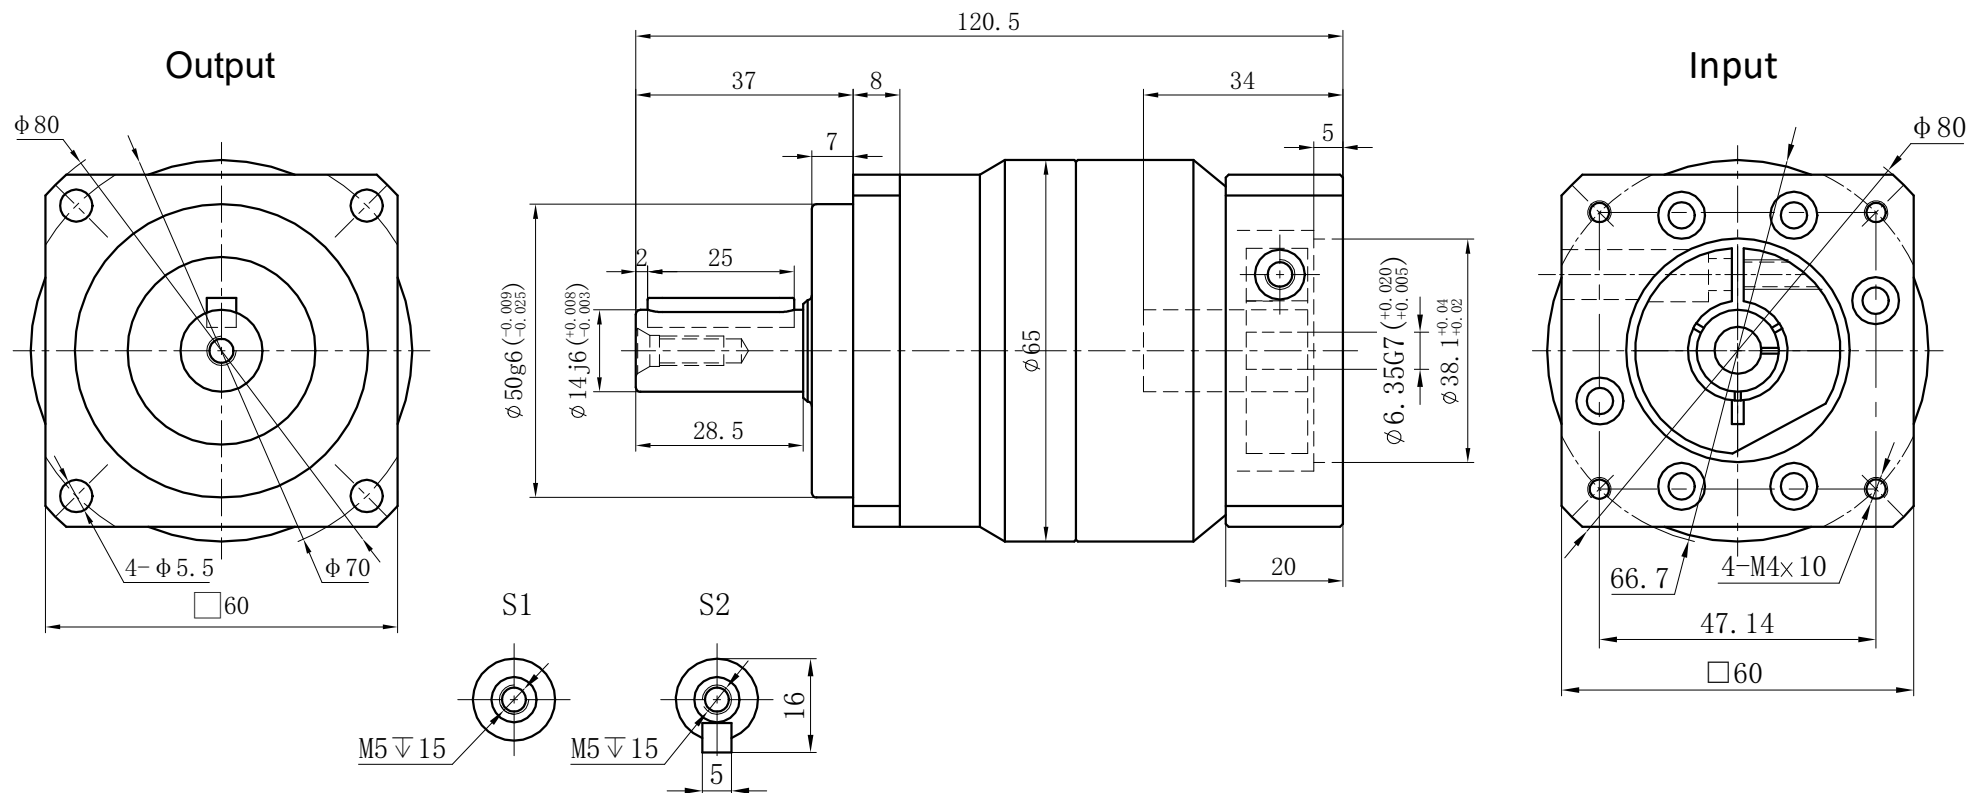


Customer Name:



Transmission Ratio	(<u> A </u>):1	Mass Moments Of Inertia	(<u> B </u>)Kg.cm ²											
Rated Output Torque	(<u> C </u>)Nm	Max Output Torque	(<u> D </u>)Nm											
Rated Input Speed	3000rpm	Max Input Speed	5000rpm		10	0.13	35	63	Sign/Date					
					8	0.13	45	81			7	0.13	45	81
Max Radial Force	1530N	Max.axial Force	765N		6	0.13	50	90			5	0.13	55	99
					4	0.14	45	81			3	0.16	40	72
Efficiency	≥ 97%	Operating Temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D
Mounting Position	Any	Lubrication Method	Synthetic grease	Note					Precision Planetary Reducer	TCB060A				
Weight ±3%	1.3Kg	Service Life	20000h	ø14 to ø6.35	Mark	No.	Sign	Date		TCB060A-L1				
Standard Backlash	≤ 5 arcmin	Protection Class	IP65			DRAW								
						CHEC								
Motor Power	-- KW	Noise Level	58dB			APPR								
Motor Dimensions						RULE						Shaft Type	Precision	

Above specifications are for standard reducer and may be subject to change without notice.