
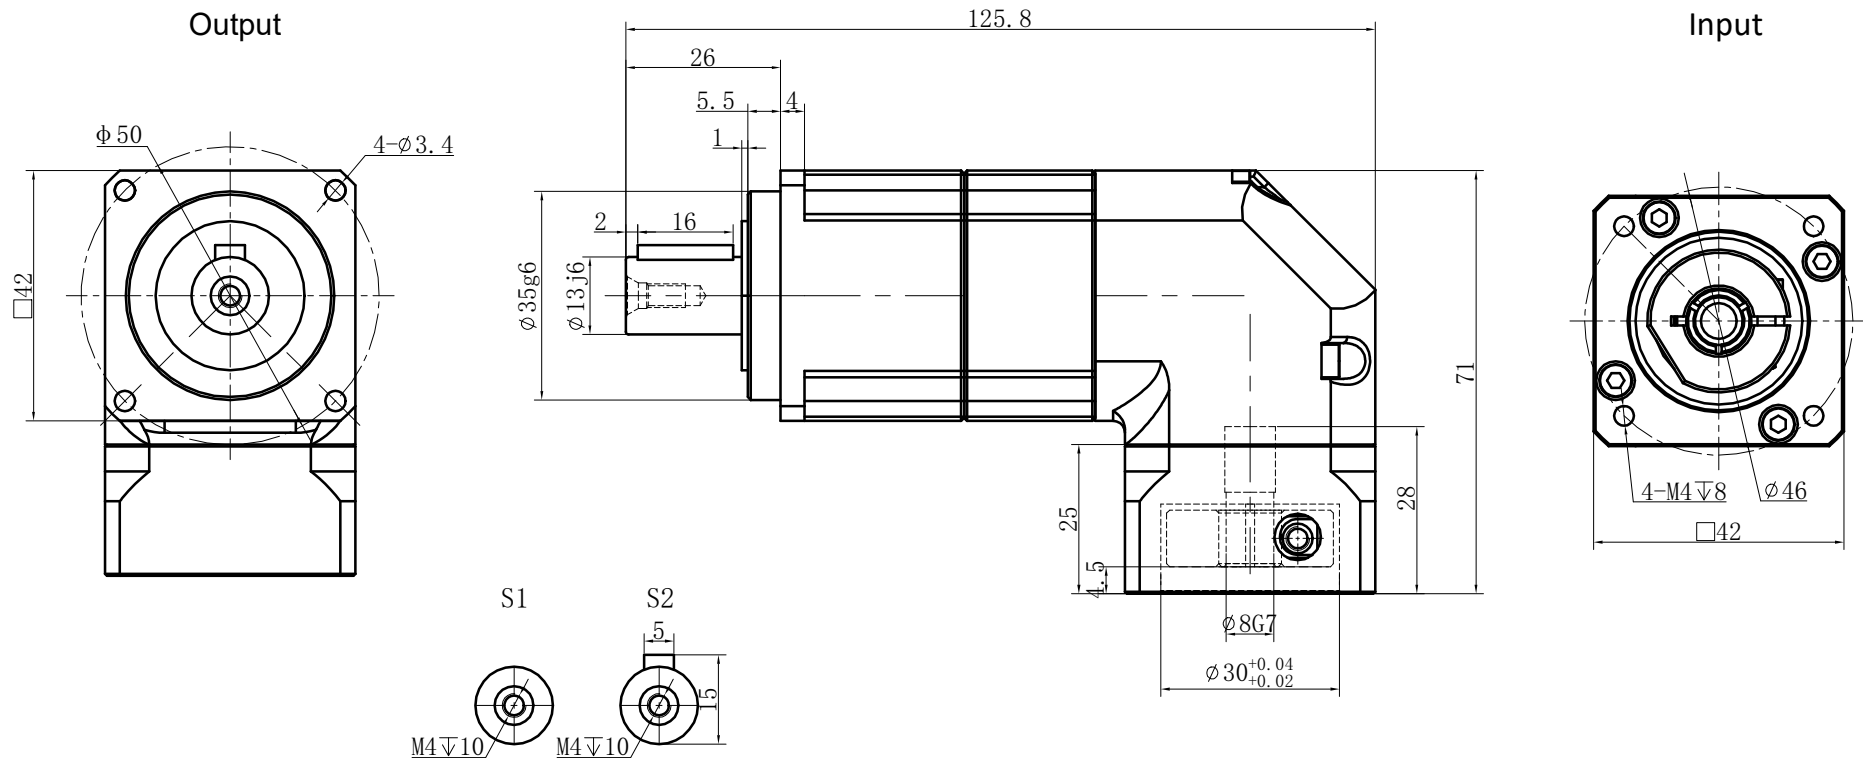


Customer name:



Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²		50	0.09	14	25.2	Sign/Date		100	0.09	14	25.2
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm		40	0.09	17	30.6			80	0.09	17	30.6
Rated input speed	5000rpm	Max input speed	10000rpm		35	0.09	19	34.2			70	0.09	19	34.2
					30	0.09	20	36			60	0.09	20	36
Max.radial force	780N	Max.axial force	390N		25	0.09	15	27						
					20	0.09	14	25.2						
					15	0.09	14	25.2						
Efficiency	≥ 92%	Operating temperature	-20°~+90°	Ratio	A	B	C	D			Ratio	A	B	C
Mounting position	Any	Lubrication method	Synthetic grease	NOTE					Precision Planetary Reducer	GBR042				
Weight ±3%	0.9Kg	Service life	20000h											
Standard backlash	≤ 9 arcmin	Protection class	IP65		Mark	No.	Sign	Date		GBR042-L2				
Motor power		Noise level	≤ 61dB			DRAW								
Motor dimensions						CHEC				Shaft Type	Precision			
						APPR								
					RULE									