
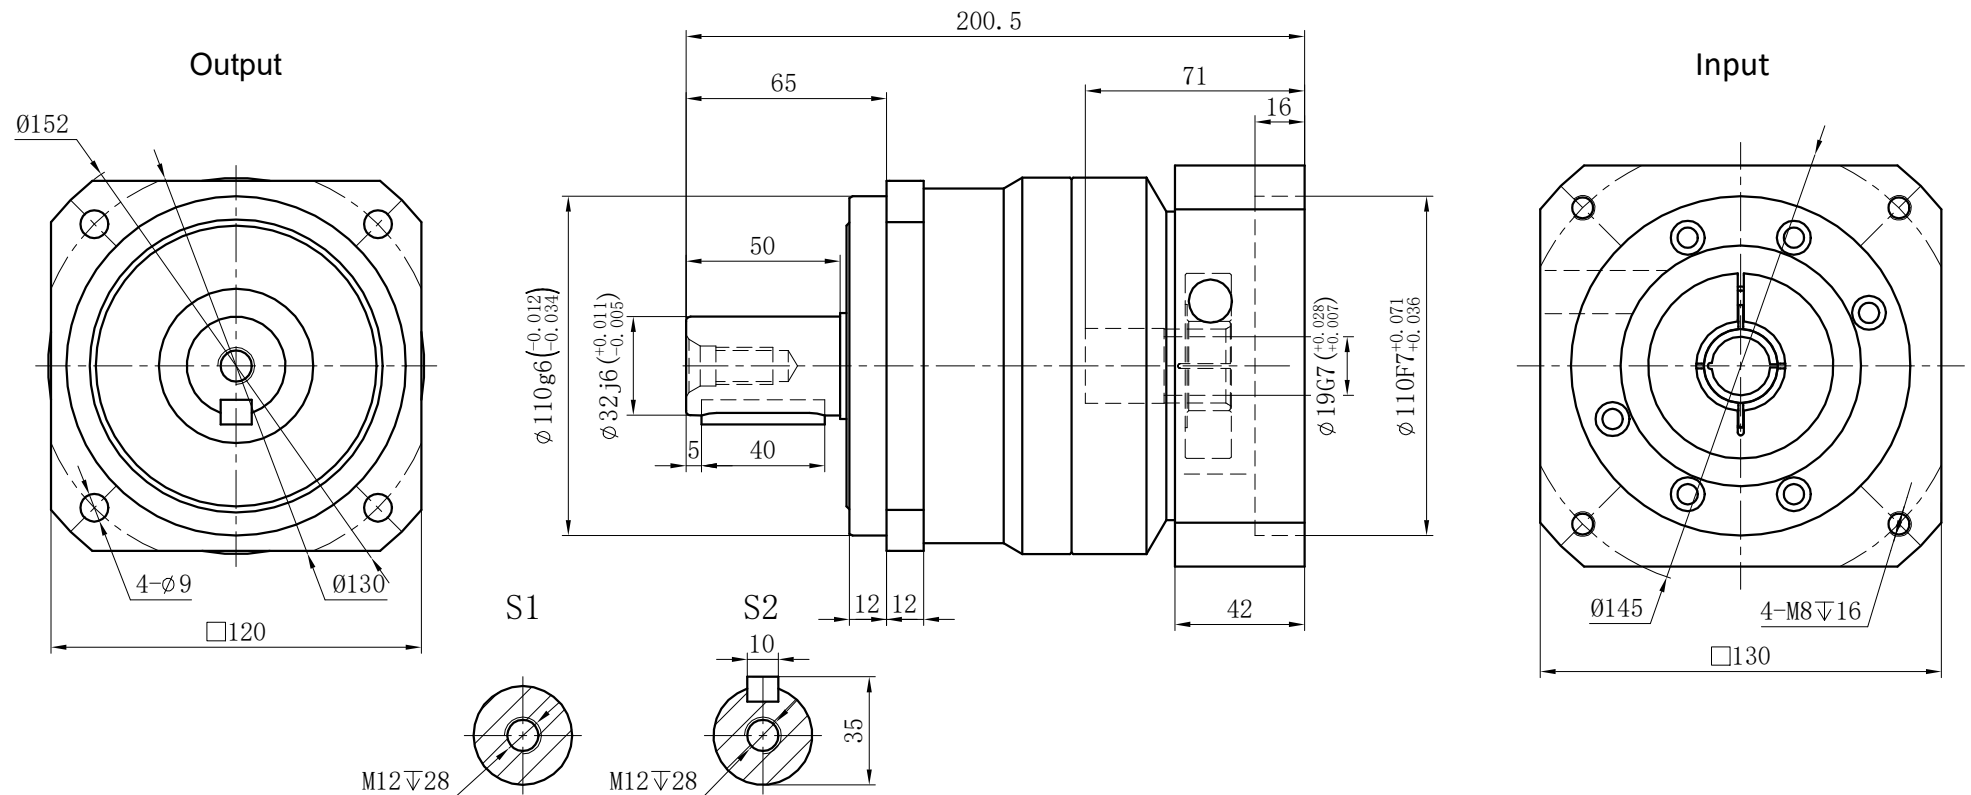


Customer name:



Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²												
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm												
Rated input speed	3000rpm	Max input speed	6000rpm		10	2.57	220	396	Sign/Date						
Max.radial force	6700N	Max.axial force	3350N		7	2.62	300	540				8	2.58	255	459
					5	2.71	320	576				6	2.65	310	558
					4	2.74	280	504				3	3.25	200	360
Efficiency	≥ 97%	Operating temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D	
Mounting position	Any	Lubrication method	Synthetic grease	NOTE Ø24 to Ø19					Precision Planetary Reducer	GCB120A					
Weight ±3%	--Kg	Service life	20000h												
Standard backlash	≤ 5 arcmin	Protection class	IP65		Mark	No.	Sign	Date		GCB120A-L1					
Motor power		Noise level	63dB			DRAW								Shaft Type	Precision
Motor dimensions						CHEC									
				APPR											
				RULE											