


Customer Name:

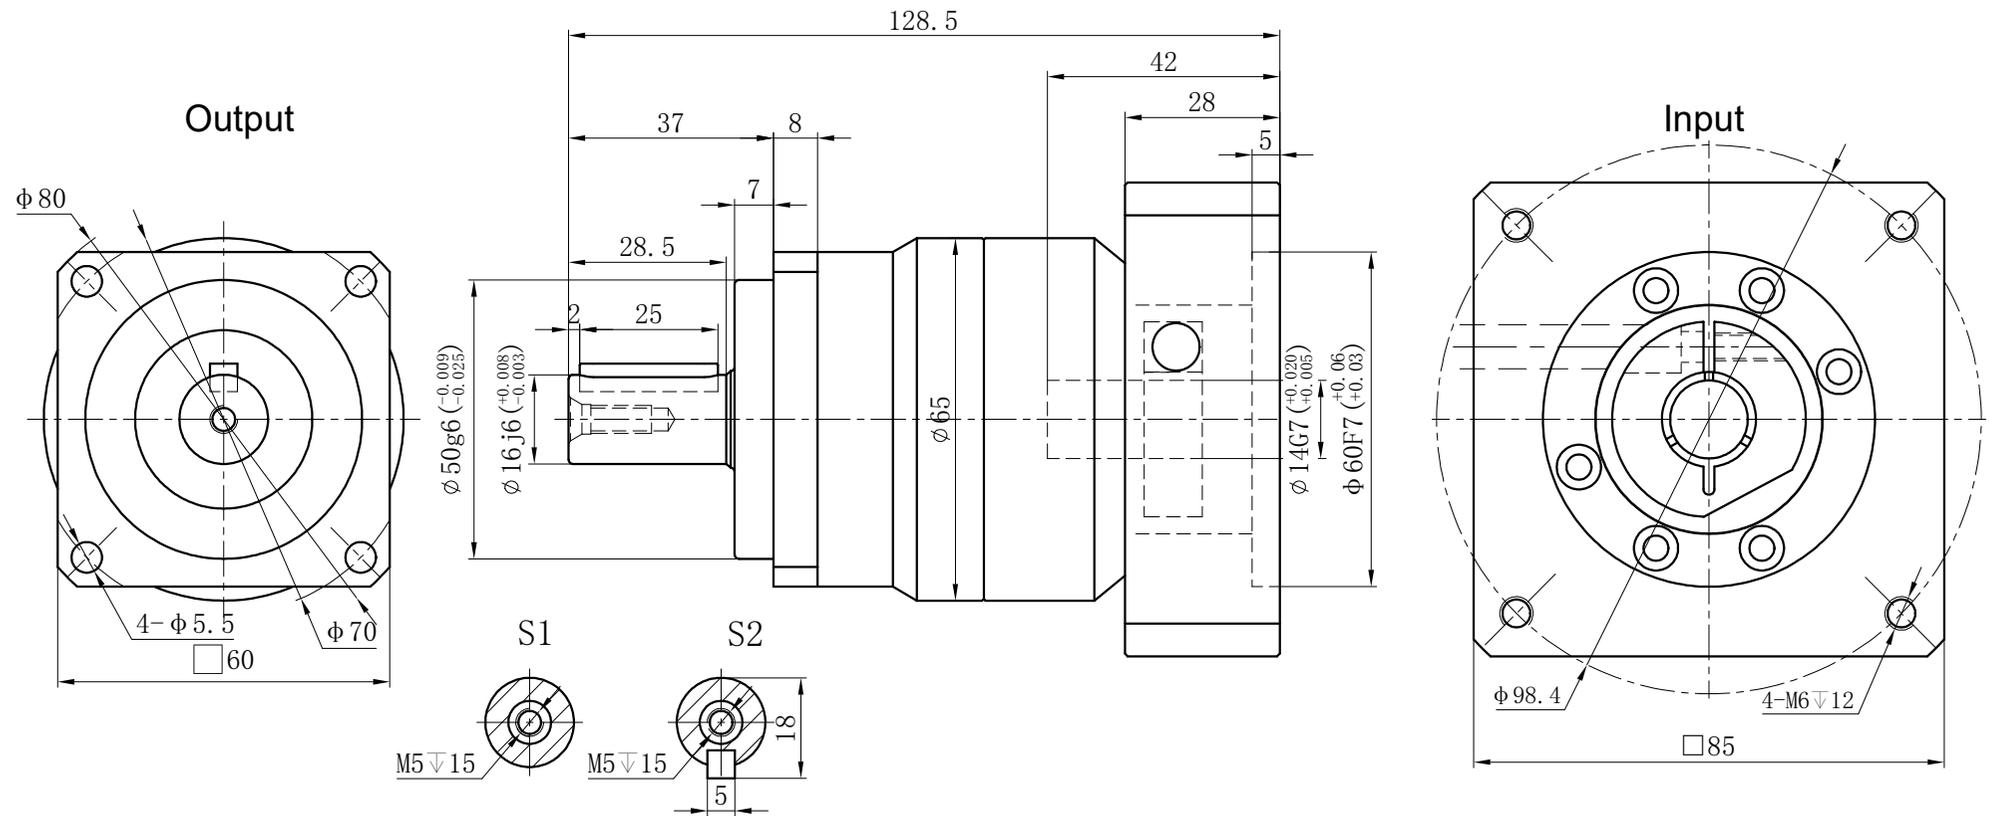

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm ²										
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm										
Rated Input Speed	3000rpm	Max Input Speed	6000rpm										
Max Radial Force	1530N	Max.axial Force	765N										
Efficiency	≥ 97%	Operating Temperature	-20~+90°										
Mounting Position	Any	Lubrication Method	Synthetic grease										
Weight ±3%	1.3Kg	Service Life	20000h										
Standard Backlash	≤ 5 arcmin	Protection Class	IP65										
Motor Power	-- KW	Noise Level	58dB										
Motor Dimensions													

	10	0.13	35	63	Sign/Date					
	8	0.13	45	81			7	0.13	45	81
	6	0.13	50	90			5	0.13	55	99
	4	0.14	45	81			3	0.16	40	72
Ratio	A	B	C	D		Ratio	A	B	C	D

Note					Precision Planetary Reducer	GCB060A	
	Mark	No.	Sign	Date			GCB060A-L1
		DRAW					
		CHEC					
	APPR						
		RULE			Shaft Type	Precision	

Above specifications are for standard reducer and may be subject to change without notice.