
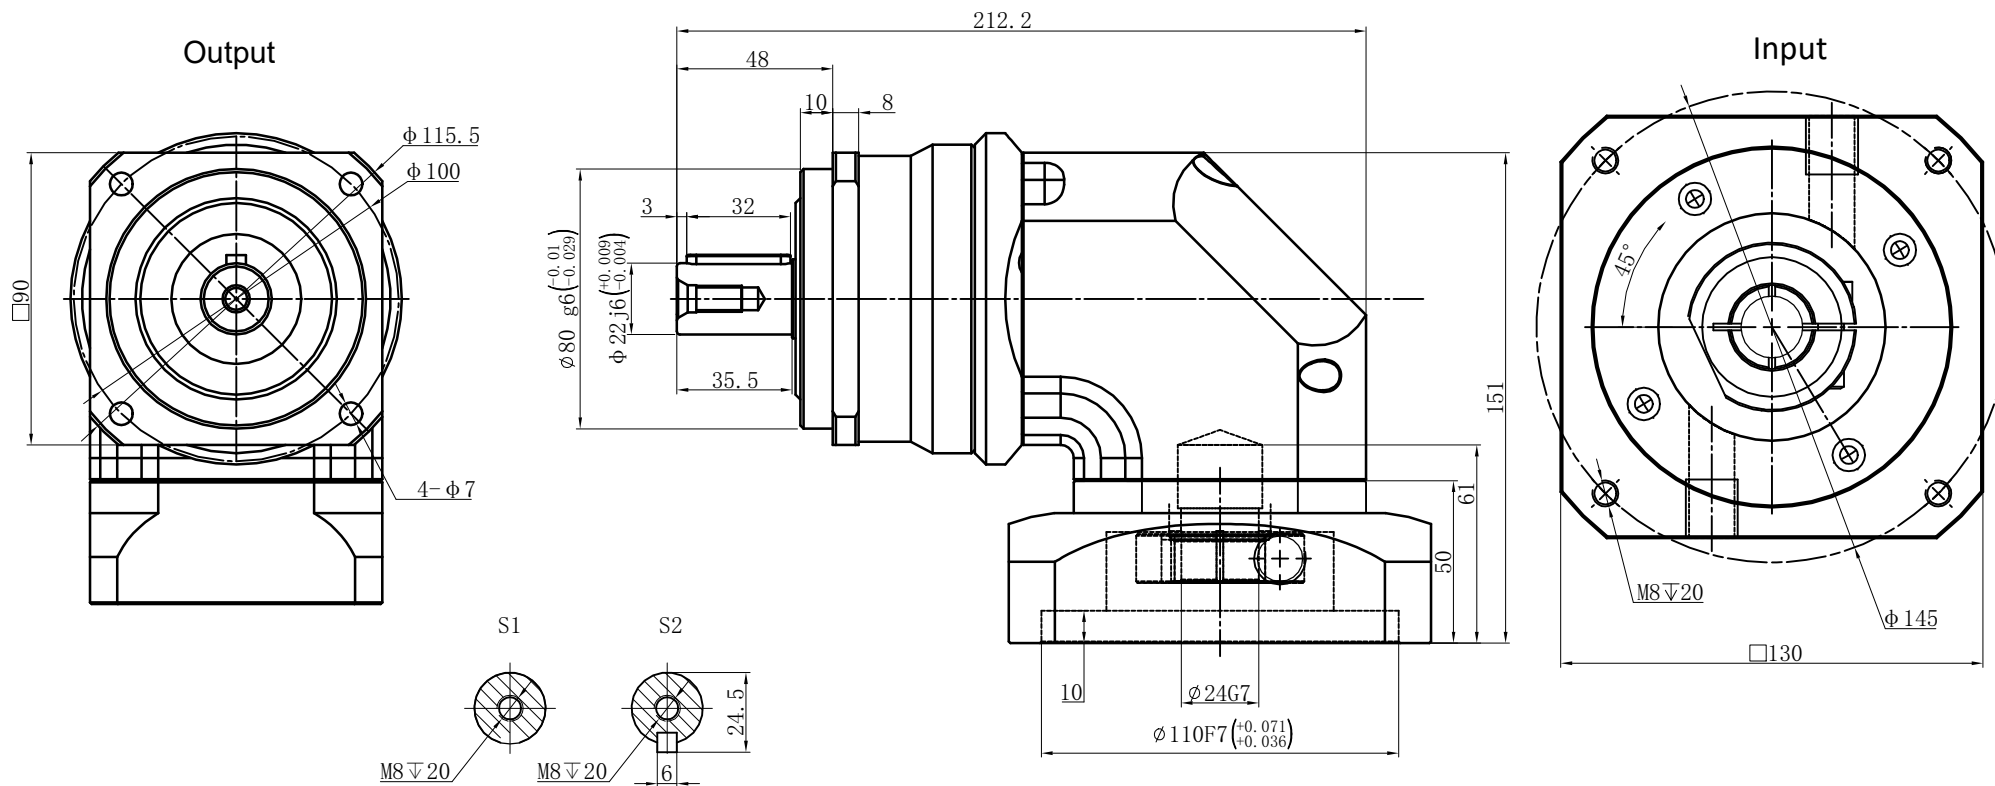


Customer name:



Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²											
Rated output torque	(<u> C </u>)Nm	Max.output torque	(<u> D </u>)Nm		16	1.87	115	180	Sign/Date					
					12	2.25	140	180			20	1.87	97	180
Rated input speed	3000rpm	Max input speed	6000rpm		10	2.25	97	180			14	1.87	135	252
					7	2.25	135	252			8	2.25	115	216
Max.radial force	3250N	Max.axial force	1625N		5	2.25	140	270			6	2.25	140	270
					4	2.25	115	252			3	2.25	85	162
Efficiency	≥ 95%	Operating temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D
Mounting position	Any	Lubrication method	Synthetic grease	Note					Precision planetary reducer	GCBR090				
Weight ±3%	6.4Kg	Service life	20000h							GCBR090-L1				
					Mark	No.	Sign	Date						
Standard backlash	≤ 6 arcmin	Protection class	IP65			DRAW								
						CHEC								
Motor power		Noise level	67dB		APPR					Shaft Type	Precision			
Motor dimensions					RULE									