


Customer Name:

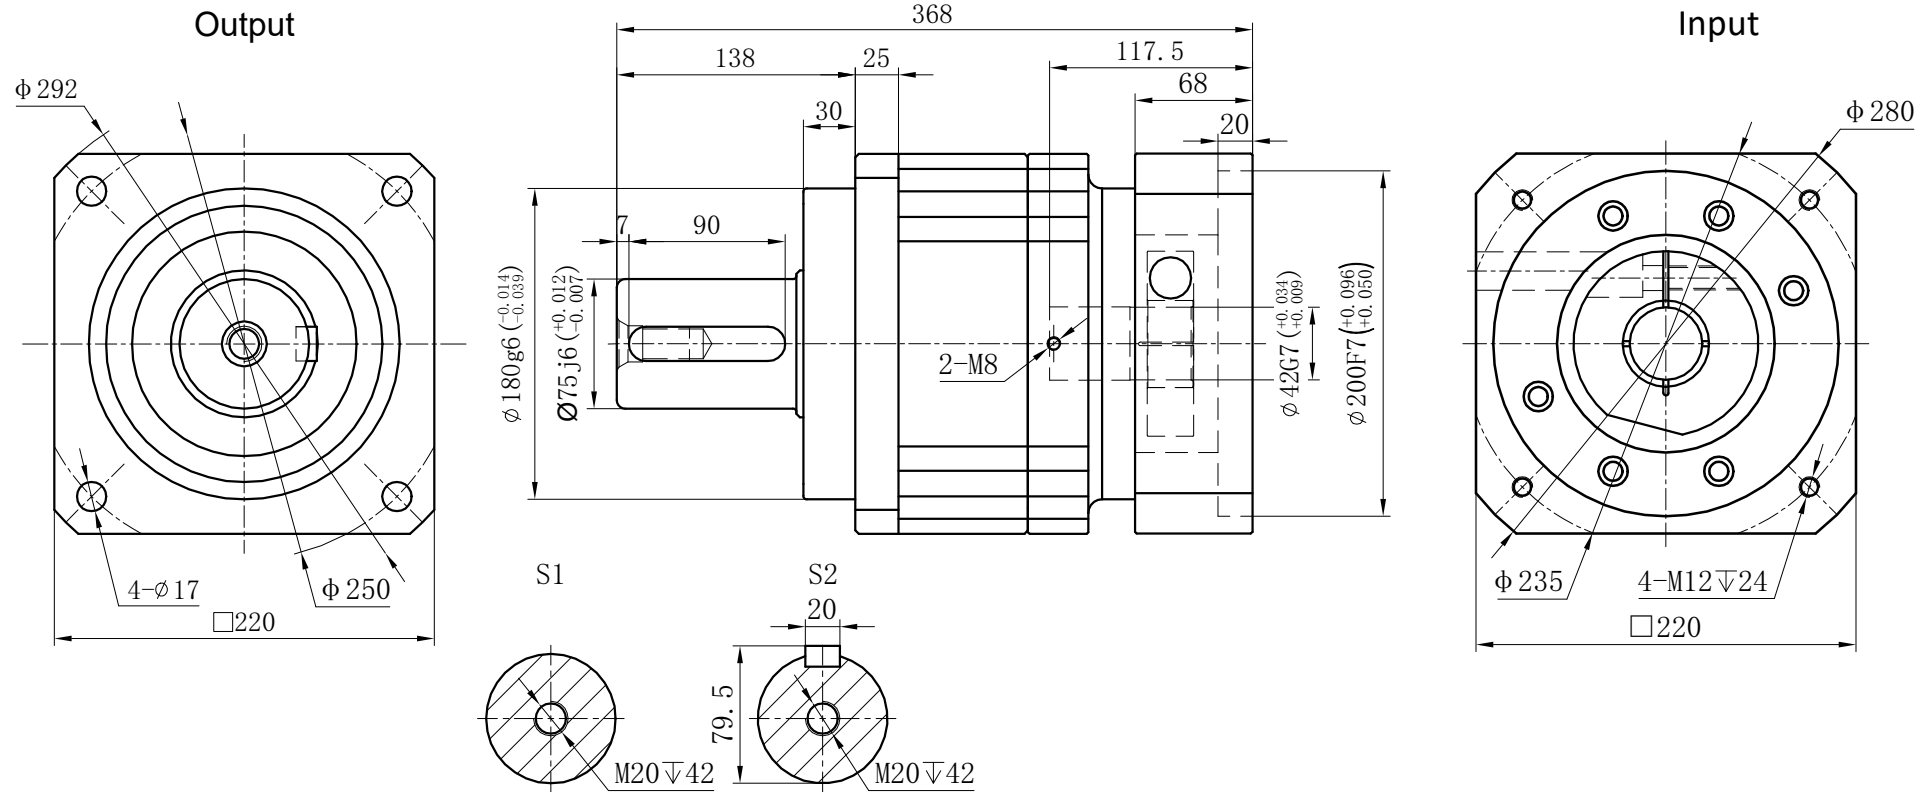

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm ²										
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm										
Rated Input Speed	2000rpm	Max Input Speed	4000rpm	3	69.61	1150	2070	Sign/Date	7	50.97	1810	3258	
Max Radial Force	50000N	Max Axial Force	25000N	4	54.37	1700	3060		8	50.84	1600	2880	
Efficiency	≥ 97%	Operating Temperature	-20~+90°	5	53.27	2008	3614		10	50.56	1550	2790	
Mounting Position	Any	Lubrication Method	Synthetic grease	6	51.72	1900	3420						
Weight ±3%	51.5Kg	Service Life	20000h	Ratio	A	B	C	D	Ratio	A	B	C	D
Standard Backlash	≤5 arcmin	Protection Class	IP65	Note						Precision Planetary Reducer		GB220	
Motor Power	-- KW	Noise Level	70dB	Mark	No.	Sign	Date					GB220-L1	
Motor Dimensions												Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.