
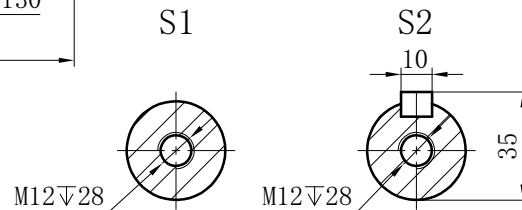
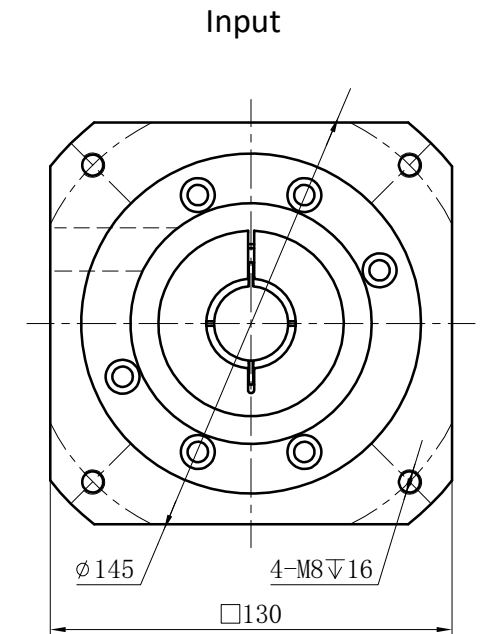
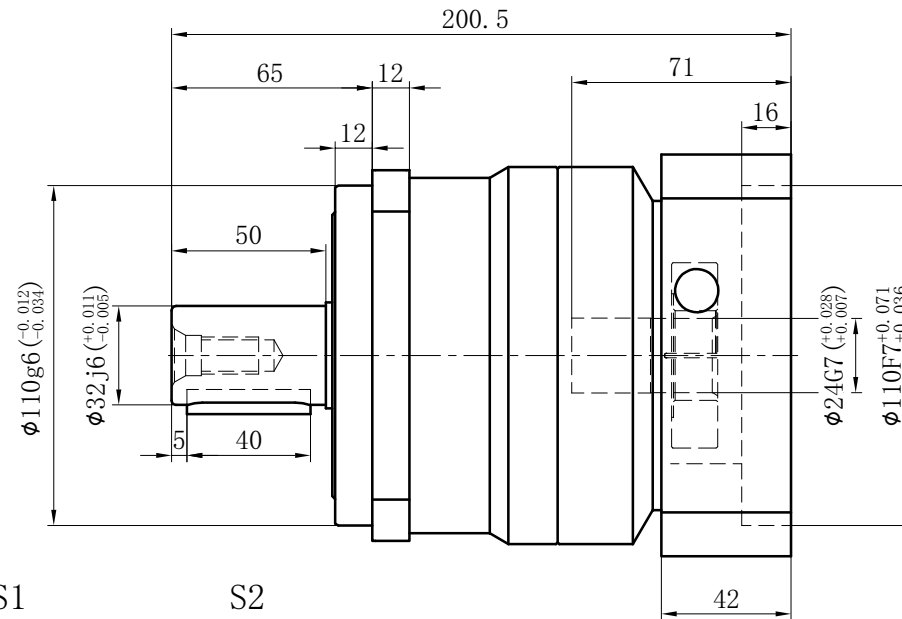
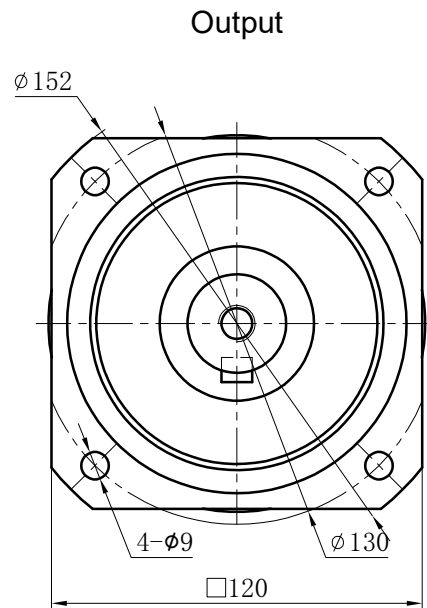


Customer name:



Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm
Rated input speed	3000rpm	Max input speed	6000rpm
Max.radial force	6700N	Max.axial force	3350N
Efficiency	≥ 97%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	--Kg	Service life	20000h
Standard backlash	≤ 5 arcmin	Protection class	IP65
Motor power		Noise level	63dB
Motor dimensions			

	10	2.57	220	396	Sign/Date					
	7	2.62	300	540			8	2.58	255	459
	5	2.71	320	576			6	2.65	310	558
	4	2.74	280	504			3	3.25	200	360
Ratio	A	B	C	D		Ratio	A	B	C	D
NOTE					Precision Planetary Reducer	GCB120A				
	Mark	No.	Sign	Date		GCB120A-L1				
		DRAW								
		CHEC								
		APPR								
		RULE								
						Shaft Type	Precision			