

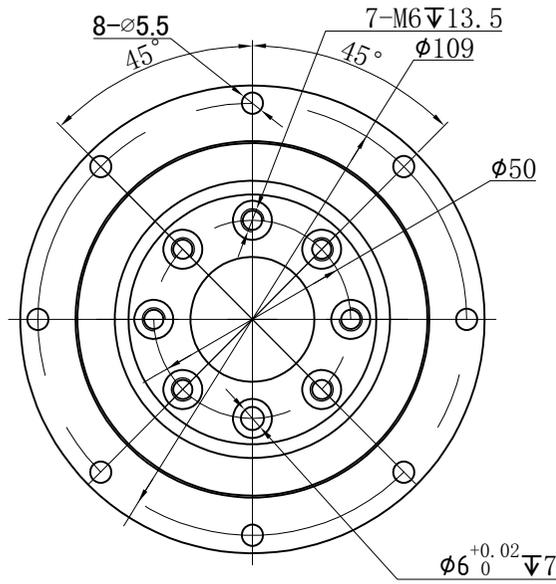


Customer name:

Output

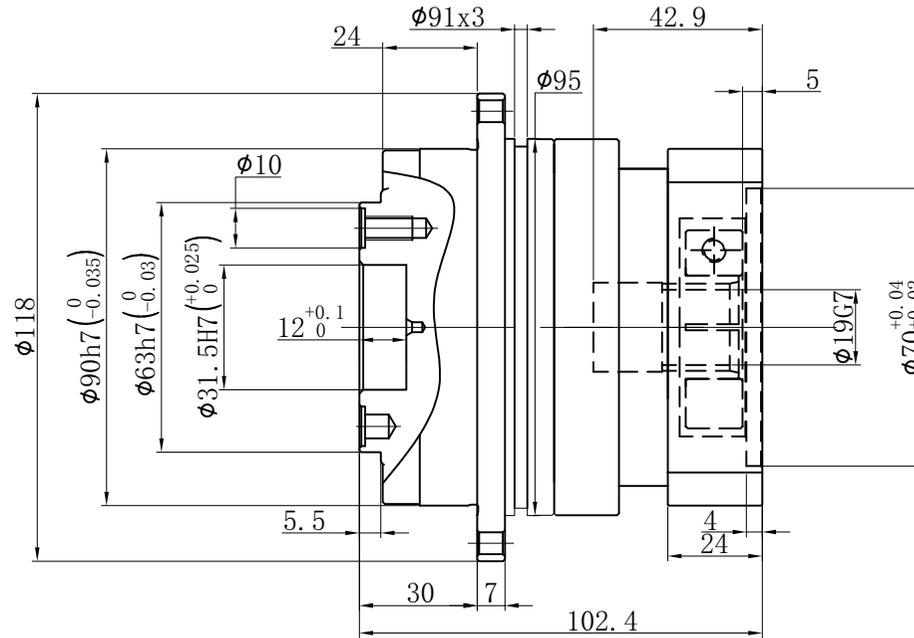

Input

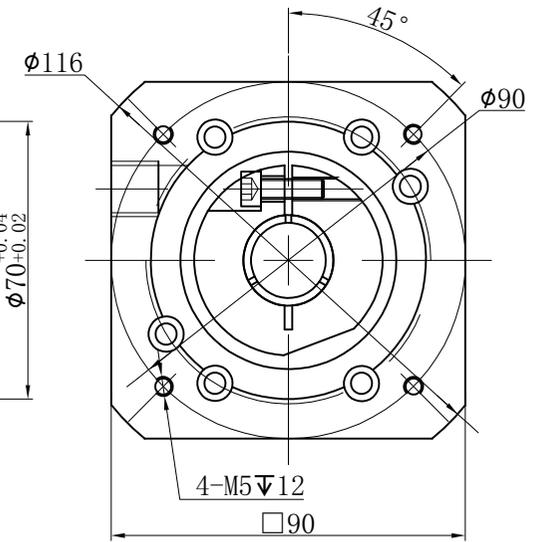

Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²										
Rated output torque	(<u> C </u>)Nm	Max.output torque	(<u> D </u>)Nm										
Rated input speed	4000rpm	Max input speed	8000rpm	10	0.44	100	180	Sign/Date					
Max Benging Moment	235Nm	Max.axial force	2850N	7	0.45	140	252						
Efficiency	≥ 97%	Operating temperature	-20~+90°	5	0.47	160	280						
Mounting position	Any	Lubrication method	Synthetic grease	4	0.48	130	234						
Weight ±3%	3Kg	Service life	20000h	Ratio	A	B	C	D	Ratio	A	B	C	D
Standard backlash	≤ 5 arcmin	Protection class	IP65	Note					Precision planetary reducer	GD090			
Motor power		Noise level	60dB	Mark	No.	Sign	Date			GD090-L1			
Motor dimensions										Shaft Type	Precision		

Above specifications are for standard reducer and may be subject to change without notice.