

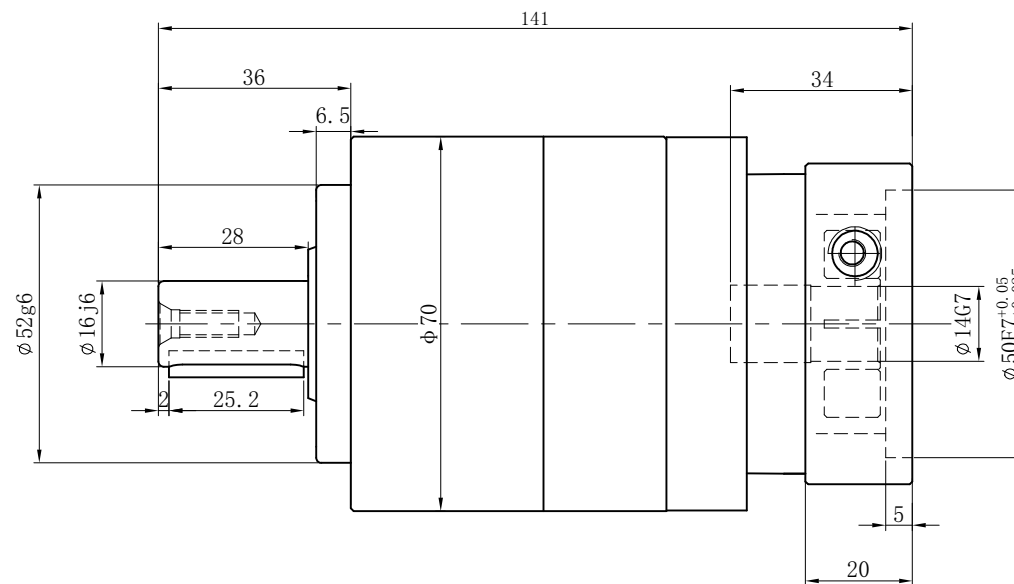
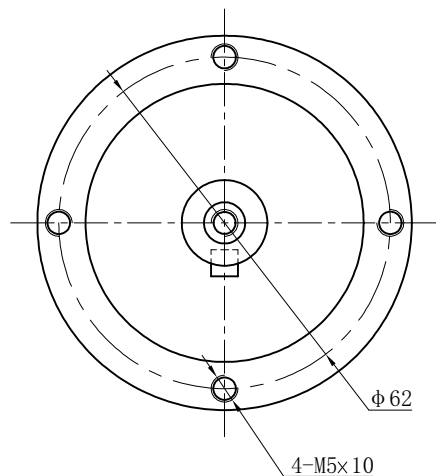



Customer Name:

Output

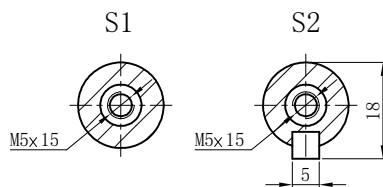

Input

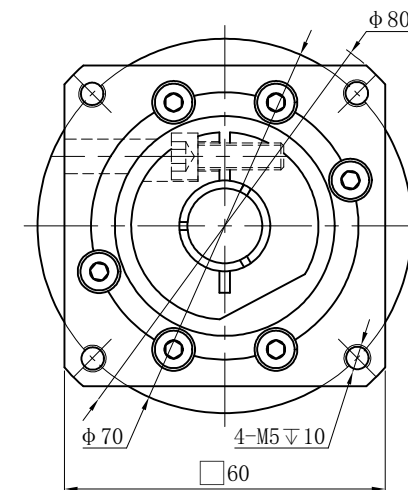

Transmission Ratio	(<u> A </u>):1	Mass Moments Of Inertia	(<u> B </u>)Kg.cm ²											
Rated Output Torque	(<u> C </u>)Nm	Max Output Torque	(<u> D </u>)Nm		40	0.13	45	81	Sign/Date					
Rated Input Speed	5000rpm	Max Input Speed	10000rpm		35	0.13	50	90			100	0.13	40	72
					30	0.13	55	99			80	0.13	45	81
					25	0.13	60	108			70	0.13	50	90
					20	0.13	50	90			60	0.13	55	99
Max Radial Force	1377N	Max.axial Force	765N		15	0.13	55	99		50	0.13	60	108	
Efficiency	≥ 94%	Operating Temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D
Mounting Position	Any	Lubrication Method	Synthetic grease	Note					Precision Planetary Reducer	GE070				
Weight ±3%	1.6Kg	Service Life	20000h											
Standard Backlash	≤ 7 arcmin	Protection Class	IP65		Mark	No.	Sign	Date		GE070-L2				
Motor Power	- - KW	Noise Level	58dB			DRAW								
Motor Dimensions						CHEC								
						APPR								
					RULE									

Above specifications are for standard reducer and may be subject to change without notice.